

Titanium performance

TiLite TR & ZR




permobil



EZ-Ti

Use our online configurator to craft your next TiLite with your specific measurements and accessories. Anyone can quickly build, spec and share as many chairs as they want.

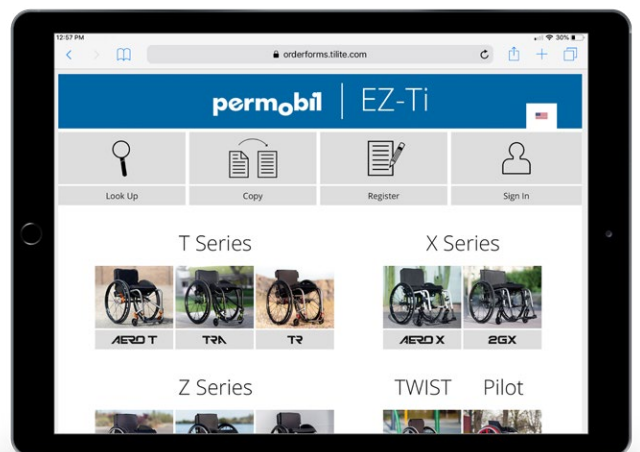

Titanium provides the lightest strength-to-weight ratio and the ability to design a chair to reduce the effects of vibration giving you the durability, comfort, and performance you deserve.



1.25"
titanium
mono-tube

TiLite ZR

Head turning style.

The ZR's titanium mono-tube frame means less truly is more. This minimalist aesthetic turns heads while the intentional frame design provides you the durability and vibration-dampening ride performance you expect from TiLite.



TiLite TR

The best from every angle.

The sweeping curves of the titanium dual-tube frame combine striking design, enhanced performance, and optimal functionality. As our flagship rigid chair, the TR's efficiency and elegance move you to the pinnacle of performance.

Ergonomic Seating

The TiLite TR and ZR are custom fabricated and tailored to each customer's specifications. TiLite's ergonomic seating can be a great solution to increase chair stability, strengthen posture, improve activity tolerance, and promote wheel access during propulsion.



Specifications

TiLite TR

Frame features	Titanium Dual-Tube Rigid, TiFit, Limited adjustability	Center of gravity adjustment	5" from 1" – 5" position
Total chair width*	22"	Folding seat back	Adj. height 9.5" – 22" Adj. angle 80° – 101°
Seat width	12" – 20"	Fixed seat back	Fixed height 5" – 20" Fixed angle 80° – 101°
Front seat width (seat taper)	0", 1", 2", 3"	Ergonomic seat	5" – 9"
Seat depth	12" – 20"	Transit options	Q-Strait lock down approved
Front seat height	15" – 21"	Transport weight*	9.3 lb.
Rear seat height	12.5" – 20"	Weight limit	265 lb.
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components
Camber	0°, 2°, 4° or 6°		

TiLite ZR

Frame features	Titanium Mono-Tube Rigid, TiFit, Limited adjustability	Center of gravity adjustment	2.5" from 0" – 5" position
Total chair width*	23"	Folding seat back	Adj. height 9.5" – 22" Adj. angle 80° – 101°
Seat width	10" – 20"	Fixed seat back	Fixed height 8" – 20" Fixed angle 80° – 101°
Front seat width (seat taper)	0", 1.5", 2.5"	Ergonomic seat	5" – 9"
Seat depth	10" – 20"	Transit options	Transport bracket
Front seat height	16" – 21"	Transport weight*	9.3 lb.
Rear seat height	12.5" – 20"	Weight limit	265 lb. Standard 300 lb. Heavy duty
Front frame angle	70°, 75°, 80°, 85°, or 90°	Warranty	Five years on frame One year on TiLite components
Camber	0°, 2°, 4° or 6°		

* Weights and widths based on 16" x 16" chair with 0° camber, minimum rear wheel spacing and all standard features. Rear wheels are not included in transport weight. For reference, a pair of standard 24" rear wheels weighs 7.2 lb.

Frame colors

High gloss paint



TiLite red



Neon pink



Super wet black

Candy paint



Ruby red



Azure blue



Electric plum

Metallic paint



Tangerine metallic



Acid green Metallic



Ocean blue metallic

Matte textured paint



Flame orange



OD green



Hyper blue

Matte paint



Titanium grey



Black lava

Pearlescent paint



Midnight blue pearl



White pearl

Natural Titanium



Satin



Polished

Component colors

Anodized



Red Pepper



Burnt orange



Sapphire



Ultraviolet



Fuchsia



Black