

# AUTOMATIC DOORS CATALOGUE



**CAME** 

[CAME.COM](https://www.came.com)



**CAME** 

# AUTOMATIC DOORS

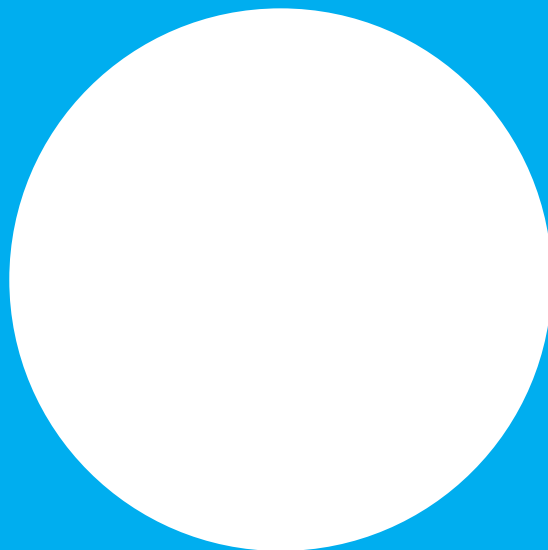

**CAME.COM**

<b>10</b>	<b>MAIN CHARACTERISTICS</b>
<b>18</b>	<b>AUTOMATIC SWING DOORS</b>
20	STANDARD SWING DOOR INSTALLATIONS
21	TRANSMISSION ARMS
22	FLUO-SW
24	FLUO-SW LIGHT - SPRING - HEAVY
<b>28</b>	<b>AUTOMATIC SLIDING DOORS</b>
30	SLIDING DOORS: STANDARD INSTALLATIONS
31	TELESCOPIC DOORS: STANDARD INSTALLATIONS
32	BEAM DIMENSIONS (MM)
34	BEAM SECTION SCALE 1: 2 (MM)
36	FLUO-SL
38	FLUO-SL BASIC
40	FLUO-SL STANDARD
42	FLUO-SL HEAVY
44	FLUO-SLM MAGNUM
46	FLUO-SLT TELESCOPIC
<b>48</b>	<b>ACCESSORIES FOR AUTOMATIC DOORS</b>
50	ACCESSORIES - SLIDING OPERATORS COMPLETION
51	ACCESSORIES - PROFILES FOR SLIDING OPERATORS IN KIT
52	ACCESSORIES - CONTROL AND SAFETY
54	ACCESSORIES - TEMPERED GLASS LEAVES THICKNESS 10 MM
55	ACCESSORIES - FRAMED LEAVES
56	ACCESSORIES - ANTI-PANIC PUSH-TO-OPEN SYSTEM FOR FRAMED LEAVES
<b>58</b>	<b>FLUO-SL BASIC</b>
58	FRAMED SLIDING LEAF
58	HEIGHT CALCULATION
<b>59</b>	<b>FLUO-SL STANDARD - HEAVY - MAGNUM</b>
59	FRAMED SLIDING LEAF
59	HEIGHT CALCULATION
<b>60</b>	<b>FLUO-SL TELESCOPIC</b>
60	FRAMED SLIDING LEAF
60	HEIGHT CALCULATION
<b>61</b>	<b>FLUO-SL BASIC</b>
61	GLASS SLIDING LEAF TH. 10 MM
61	HEIGHT CALCULATION
<b>62</b>	<b>FLUO-SL STANDARD - HEAVY - MAGNUM</b>
62	GLASS SLIDING LEAF TH. 10 MM
62	HEIGHT CALCULATION
<b>63</b>	<b>FLUO-SL TELESCOPIC</b>
63	GLASS SLIDING LEAF TH. 10 MM
63	HEIGHT CALCULATION
<b>64</b>	<b>PROFILES FOR LEAVES: SECTIONS AND DIMENSIONS SCALE 1: 1</b>
<b>66</b>	<b>ANALYTICAL INDEX</b>
<b>68</b>	<b>GENERAL CONDITIONS OF SALE</b>



# BRUSHLESS MOTORS FOR MAXIMUM EFFICIENCY

CAME solutions for pedestrian automatic doors are at the forefront in terms of efficiency and reliability.

All versions, both swing and sliding, are equipped with an innovative brushless DC motor.

The absence of brushes inside the system guarantees greater performance and lower maintenance costs.


CAME motors work at low speed, around 600 rpm: in this way the mechanical wear is considerably reduced, extending the product life more than 10 times compared to traditional solutions on the market.

Lower maintenance costs and reduced assistance become the key to a successful relationship between the installer and customer.

The Brushless motor of the FLUO range is a flexible solution, which can be installed in any type of environment, both residential and commercial: it adapts perfectly to professional settings, hospitals and medical clinics, and can be used for emergency exits .

FLUO operators are designed and manufactured in compliance with the safety requirements required by European regulations. Efficiency and reliability are certified by the TUV mark.



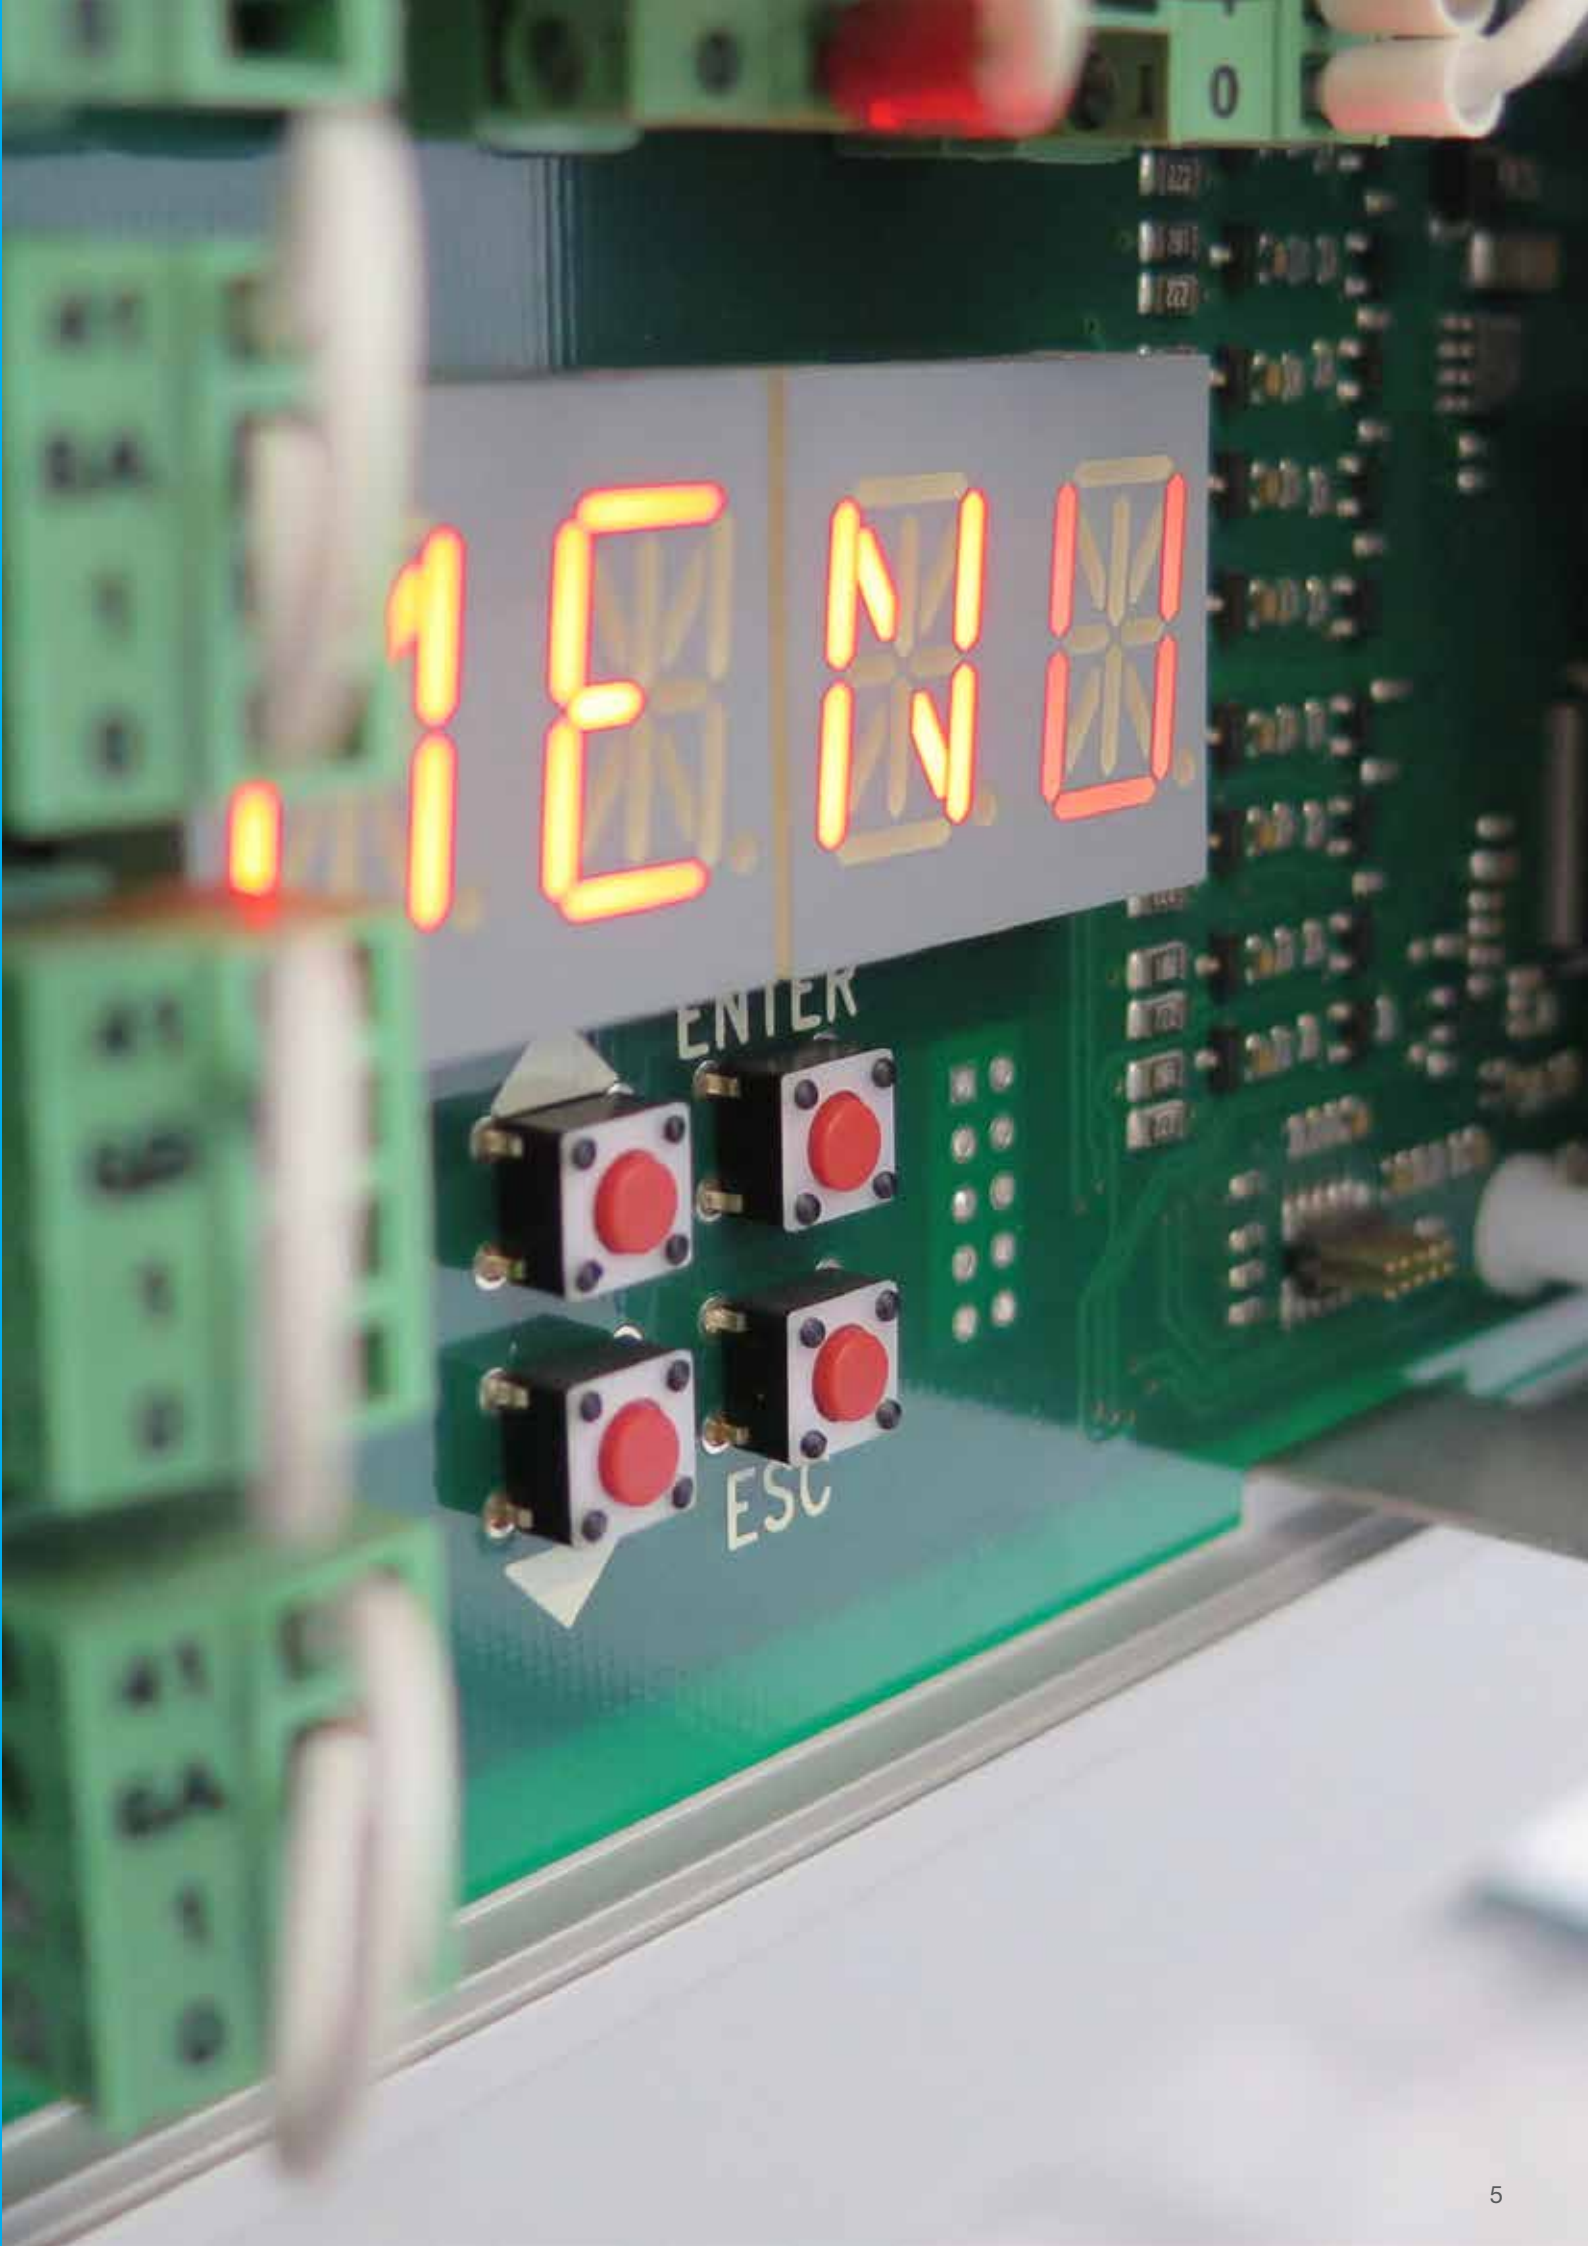



# DIRECT DRIVE SYSTEM FOR MAXIMUM SILENCE

The Brushless motor, equipped with a direct drive system on the belt without reducer, combines high performance with low consumption.

Thanks to this technological innovation, the operators for sliding doors can work at reduced speeds, significantly reducing energy consumption.

Furthermore, the noise is almost completely eliminated thanks to the gaskets that absorb the vibrations, guaranteeing an exceptional silent operation.

## ENERGY SAVINGS SOLUTIONS

The new FLUO range is equipped with the latest generation control board, with extended range power supply (100 - 240 V) and Switch mode. The 32-bit microcontroller can be easily configured thanks to an alphanumeric display that makes the settings easy and quick.

To further simplify the installation operations, the board is supplied with a standard pre-configuration: the professional, for basic applications, can simply use the default settings without having to load new parameters.

The motor is designed to work in any condition: thanks to the Switch mode it detects the voltage and automatically switches from 100 to 240 V. The low rotation speed reduces energy consumption by 54%.





# SIMPLE INSTALLATION

CAME focuses on quick and easy installation.

The support beam, thanks to the exclusive fixing system, can be installed by only one person, minimizing the time and costs for the operation.

Even the internal components have been designed to limit the number of necessary tools, so as to make the whole job easier; in addition, the snap-on fixing mechanism facilitates the motor replacement and maintenance.

Even the sensor support follows the same innovation, and is directly connected to the bracket instead of to the body.

Thanks to the fixing by magnets it is not necessary to disconnect the wires or remove the cover, so all operations become extremely quick and simple.

**Working on operator is even more faster and safer.**





# SELECTOR CAPACITIVE TOUCH SCREEN

The function selector, with a modern and discreet design, is equipped with a capacitive touch screen and can be configured in different modes. Intuitive icons help the user to choose among 4 different authorization levels:

- Opening always active
- Opening by touching the selector
- Contactless opening via badge
- Opening via number code

The function selector is the main accessory for the operator control. Available in 2 different versions, it is an advanced device with a simple and intuitive interface.

The CAME selector supports all the latest technologies for access control, including the MiFare transponder module.


The selector supports several functions:

- Door locked with key
- Door locked with key unlocking
- Bidirectional automatic opening
- Unidirectional automatic opening
- Partially automatic opening
- Priority closing function
- Operator reset function
- Touch function to reactivate the selector from the stand-by mode
- Activation of the selector via transponder badge


The selector also shows indications relating to:

- Function selector not active.
- Operator that works with an emergency battery system
- Ordinary maintenance.
- General mechanical malfunction
- Error in the safety device test
- Failure of the emergency system
- Warning of too high motor temperature

Functions selector with RFID.



BASIC functions selector.




# DUAL RAIL: THE INNOVATIVE SYSTEM FOR TELESCOPIC DOORS

Installation and maintenance of telescopic doors is always very complex due to the difficulty of accessing the secondary leaf.

The DUAL RAIL system allows easy access to the secondary leaf because it leaves the sliding guide of the primary leaf suspended, connecting it to the profile of the box using modular brackets with front coupling.

The return system is characterized by a dual pulley transmission that allows to adjust the two doors separately, moving them by hand in a much simpler way than traditional telescopic solutions.

Once the installation or maintenance operations are completed, a quick locking system makes the two pulleys work again.

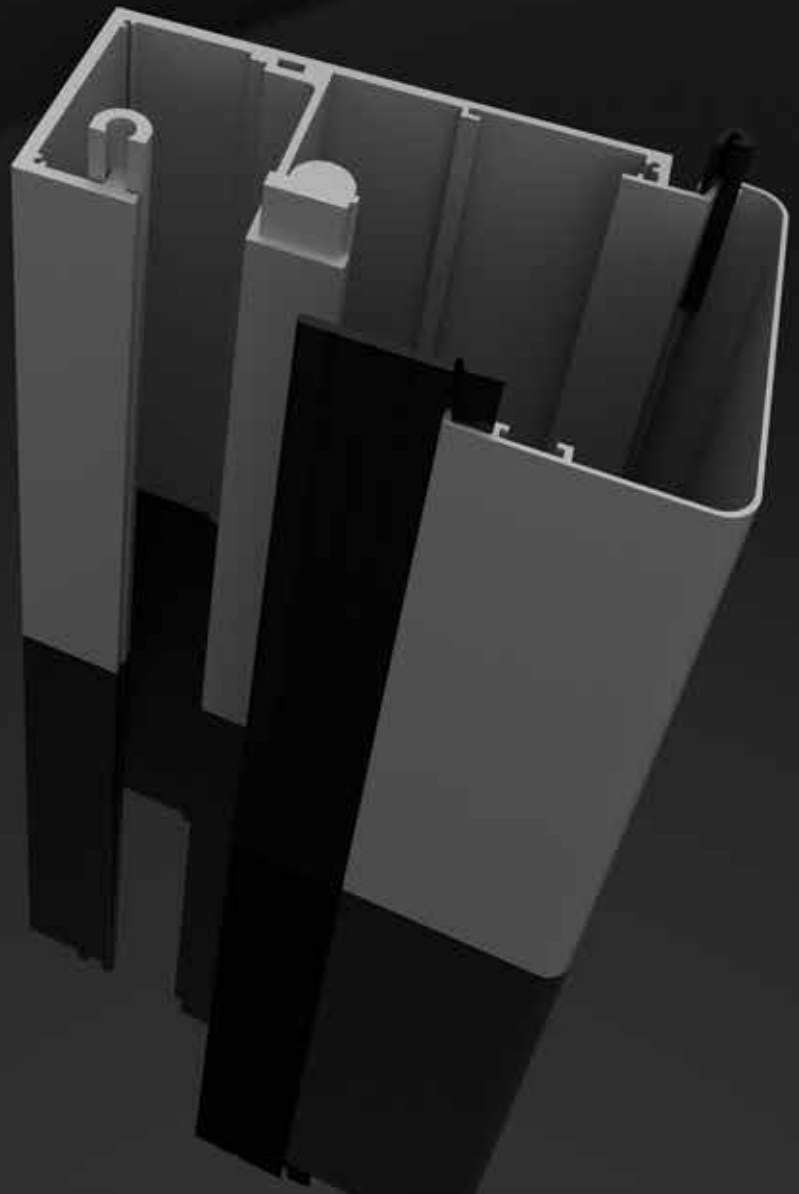

# FLUO-SL EMERGENCY


The international safety regulations require that emergency exit doors can be opened even if a power failure occurs. Usually, to meet this need, the operator requires the installation of bulky and inconvenient additional modules to complete the system.

CAME solutions use a Brushless motor with double winding and direct drive on the belt, without gearbox. The sophisticated control system constantly monitors the position and speed of the leaves to optimize torque, improving efficiency. The two windings are completely independent of each other and guarantee the door opening even in the event of an electrical failure or a blackout.

The electronic control unit has an additional emergency board installed directly on the main board and connected through a serial communication CAN bus.

Even if the two boards are installed together, the emergency board is completely independent from the main board because it is provided with its own microcontroller.

The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, operators approved for this purpose, with standard sliding leaves, to replace the traditional operators with sliding push-to-open leaves, in the direction of emergency exit.

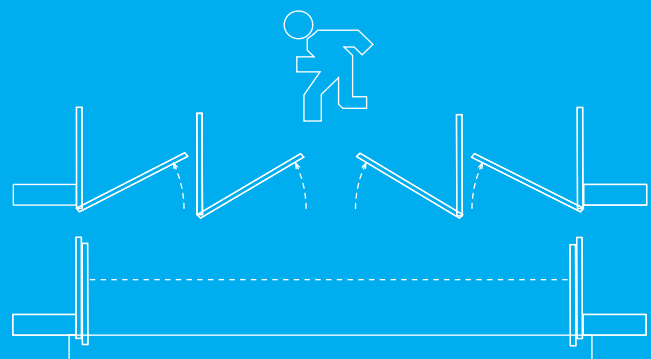

# AUTOMATIC SWING DOORS

TYPE


LIGHT

SPRING

HEAVY

**CAME** 

[CAME.COM](https://www.came.com)

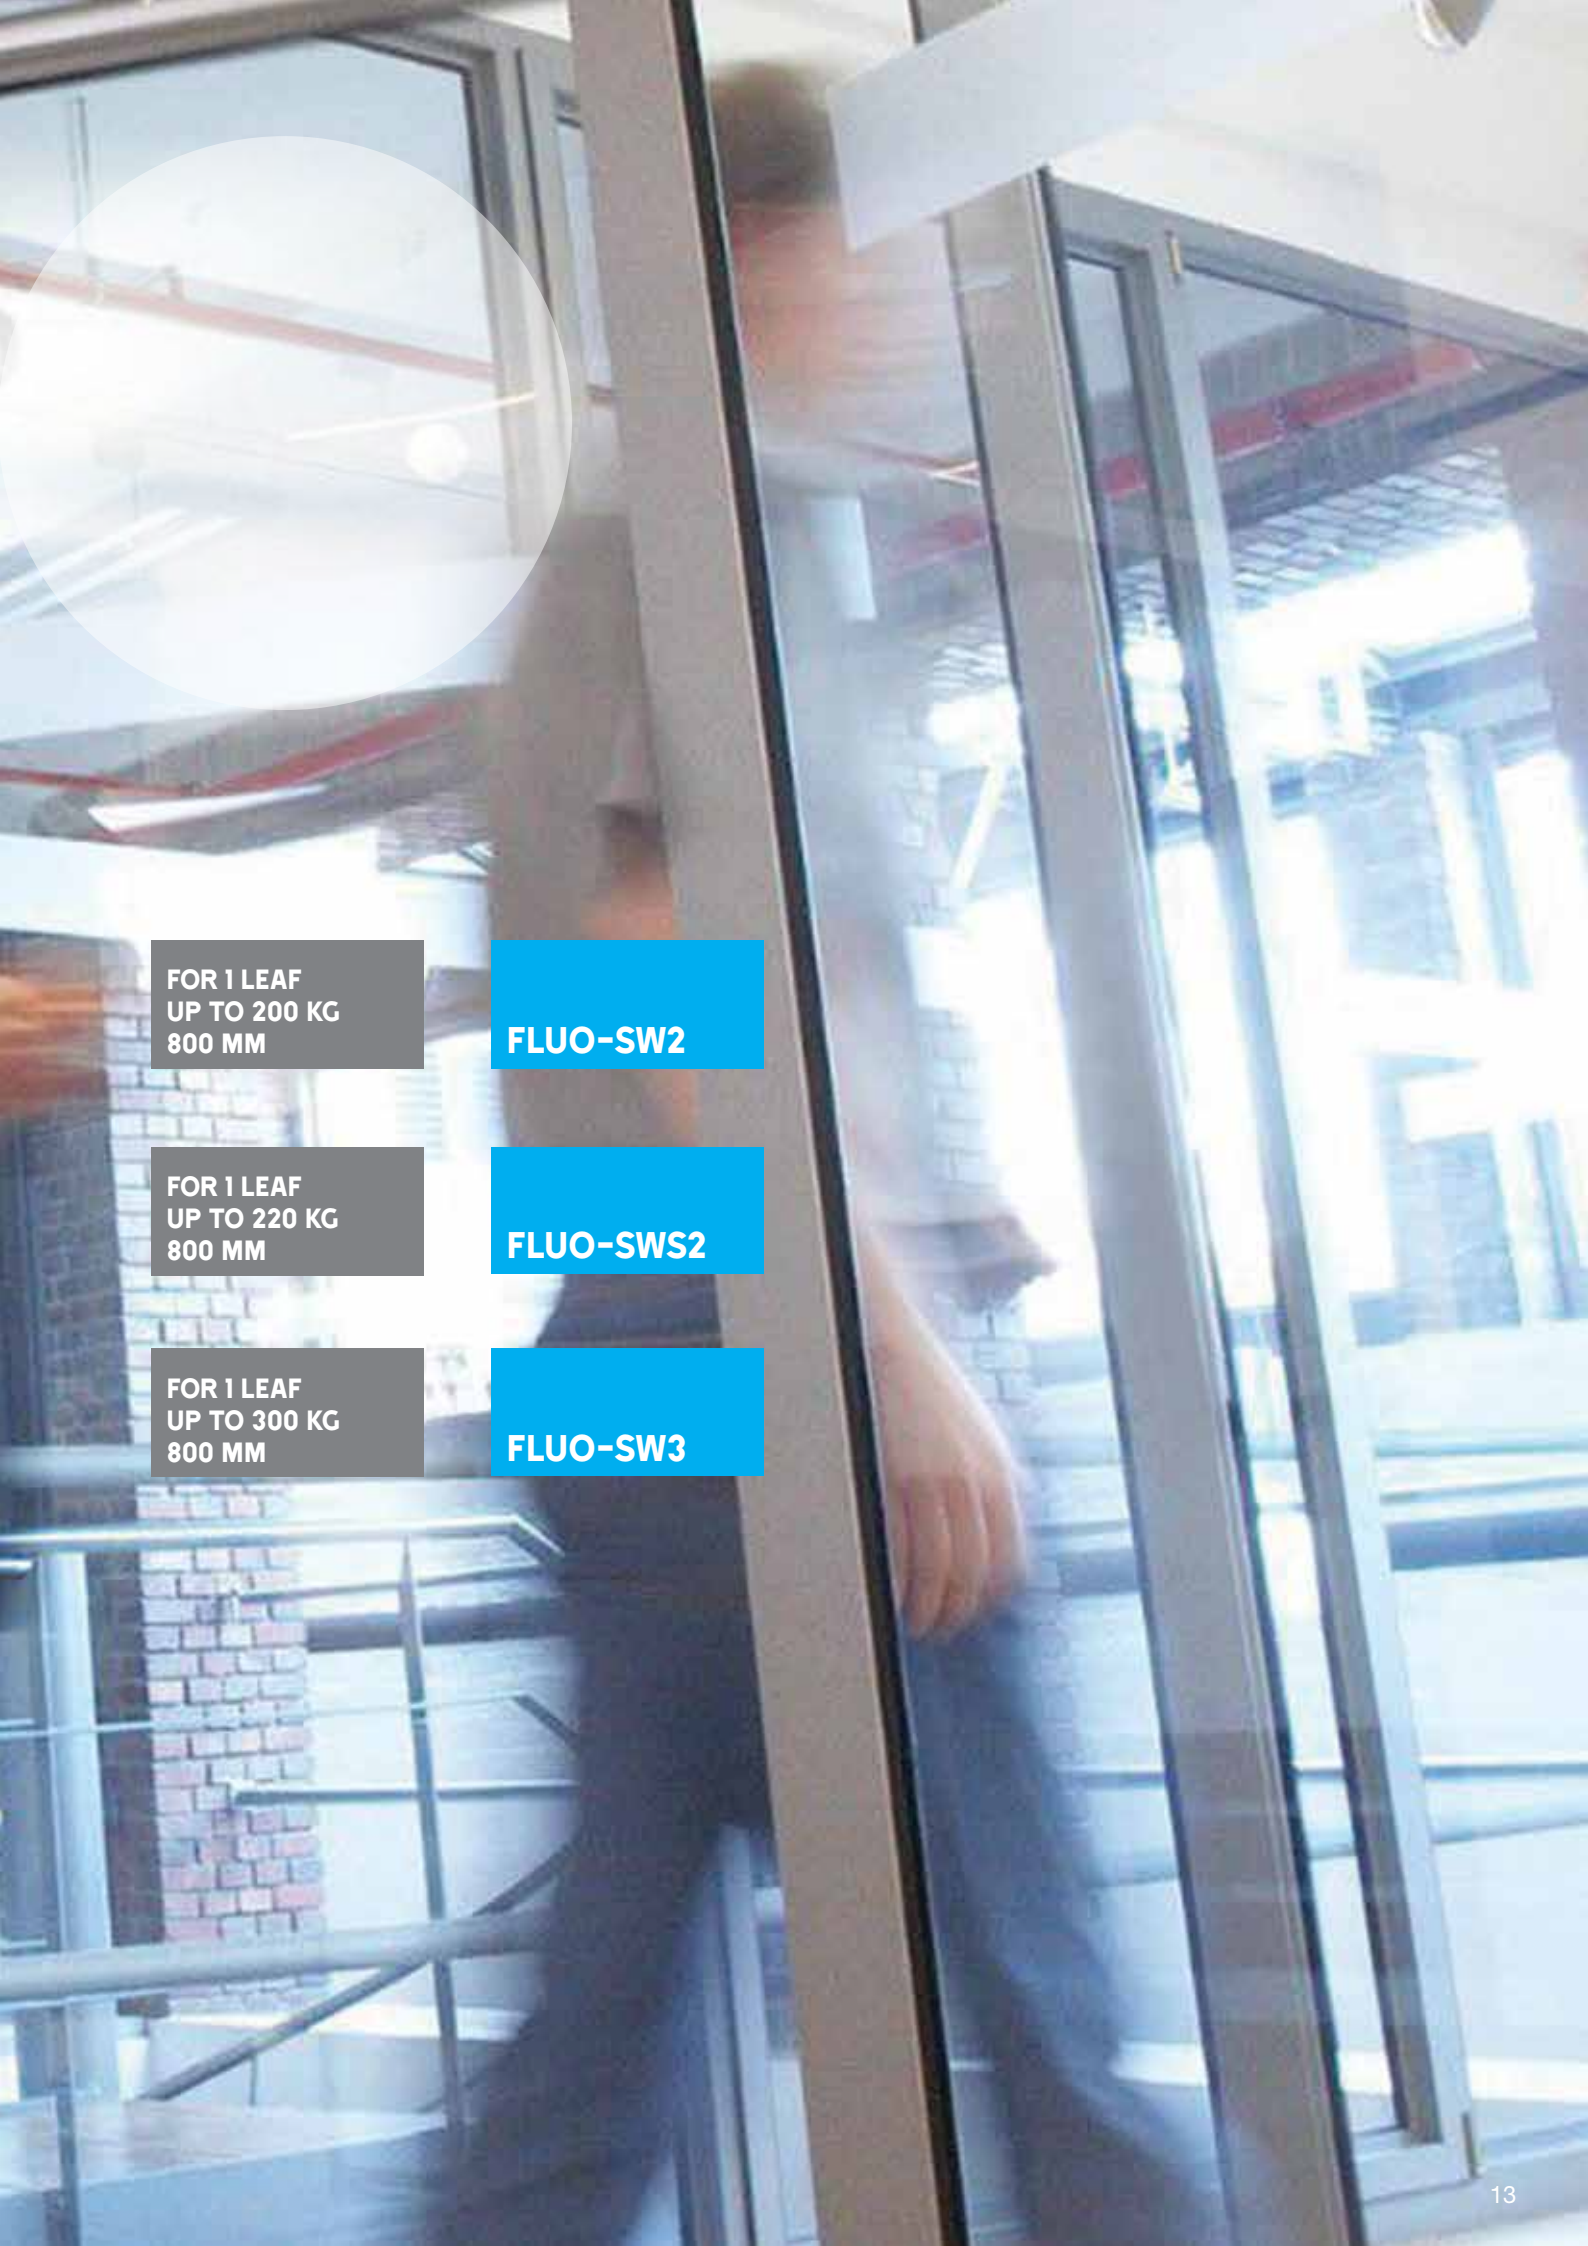

FOR 1 LEAF  
UP TO 200 KG  
800 MM

**FLUO-SW2**

FOR 1 LEAF  
UP TO 220 KG  
800 MM


**FLUO-SWS2**

FOR 1 LEAF  
UP TO 300 KG  
800 MM


**FLUO-SW3**

# STANDARD SWING DOOR INSTALLATIONS

## 1 SWING LEAF

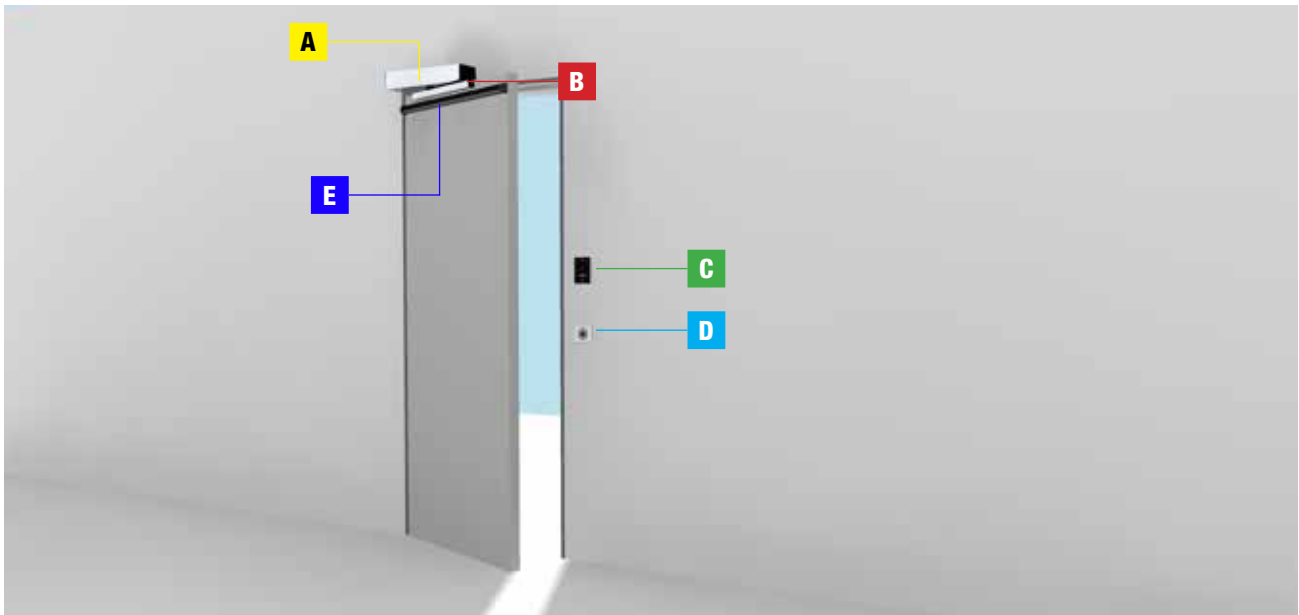

## 2 SWING LEAVES

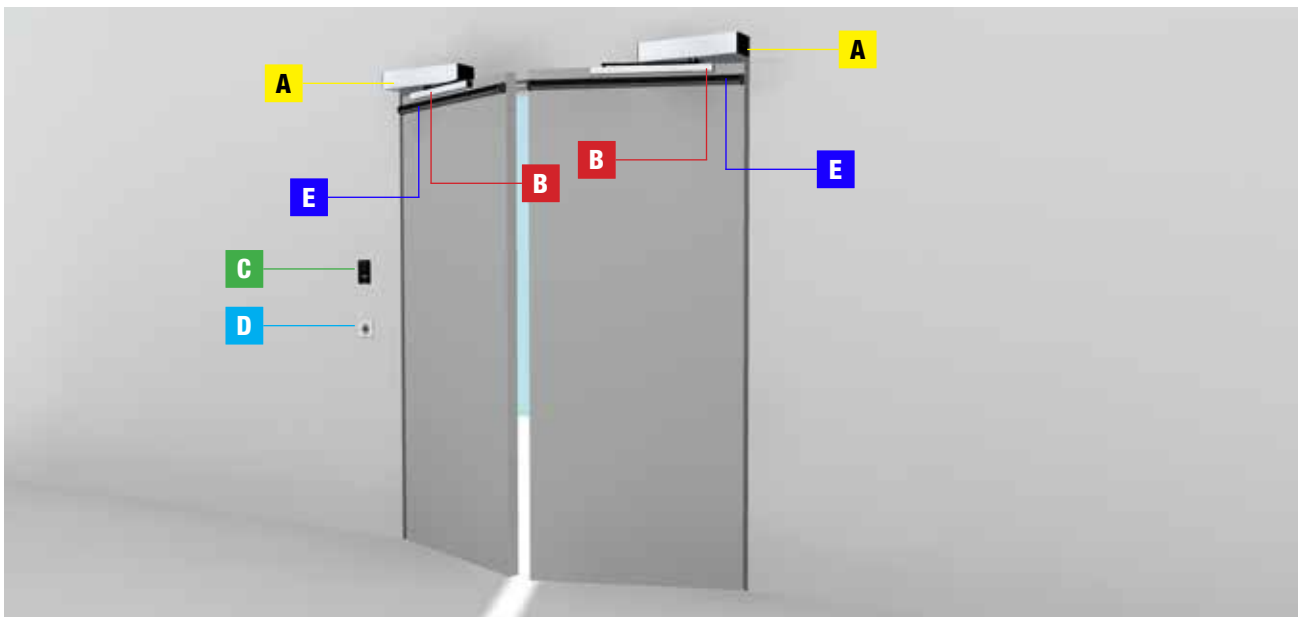

### A

- Operator (control board-fitted gearmotor)
- Power outage emergency operation board.
- Control panel

### B

- Transmission lever

### C

- Functions selector

### D

- Swipe sensor

### E

- Safety/control sensor




## TRANSMISSION ARMS

### 818XA-0040

#### STRAIGHT PULL ARM

To be used when the door must open from the same side where the operator is installed.


Equipped with mechanical limit switch.



### 818XA-0041

#### HINGED PUSH ARM

To be used when the door must open on the opposite side from where the operator is installed.




### 818XA-0059

#### STRAIGHT PUSH ARM

To be used when the door must open on the opposite side from where the operator is installed.

Equipped with mechanical limit switch.



### ALSO A SINGLE PROFILE CUT TO MEASURE

The 2-leaf hinged configuration of FLUO-SW can also be made using a single containment profile, cut to measure on customer request.



## CABLES FOR STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230 V AC Power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
Functions selector 818XA-0043 - 818XA-0050	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted
818XC-0039 Mechanical selector	3 x 0.5 mm <sup>2</sup>	-	-
12 - 24 V AC - DC touch sensors	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>
Command and control devices	*n° x 0.5 mm <sup>2</sup>	*n° x 0.5 mm <sup>2</sup>	*n° x 0.5 mm <sup>2</sup>

# FLUO-SW

Extremely silent swing door thanks to the brushless DC motor.

Fully reversible gearmotor.  
Emergency battery.





## EN 16005

This door has been designed and certified in accordance with the requirements of the European Standards.

## EASY TO INSTALL SIMPLE TO USE

### EASY TO INSTALL

There is no need for specific structures as the operator can be installed directly on the upper part of the door, easily connecting the arm. The accessories can be connected quickly, directly to the main board through direct connection.

### A COMPLETE SOLUTION

- Low consumption and great reliability, thanks to the Brushless motor.
- Very silent during movement.
- Perfectly reversible for manual opening.
- Different movement arms, available for doors to push or pull.
- Available in spring closing version.

### INNOVATIVE ELECTRONIC CONTROL UNIT

- Pre-configured board for standard installations, without the need to set additional parameters.
- Fully customizable configurations for specific installations.
- Parameters setting and monitoring through alphanumeric display.
- Board with dedicated connectors for each individual accessory.
- Obstacle detection.

# FLUO-SW LIGHT - SPRING - HEAVY

FLUO-SW2	LIGHT	UP TO 200 KG
FLUO-SWS2	SPRING	UP TO 220 KG
FLUO-SW3	HEAVY	UP TO 300 KG



## Code Description

### FLUO-SW2 - Operators for 1 swing leaf doors with motor-powered opening and closing

<b>818SW-0010</b>	Operator for 1 swing leaf with motor-powered opening and closing. Standard profile length L = 443 mm. Leaf maximum weight up to 200 Kg.
-------------------	---

NOTES:

818SW-0010 FOR INDOOR APPLICATIONS DOES NOT SUBJECT TO WIND GUSTS

### FLUO-SW3 - Operators for 1 swing leaf doors with motor-powered opening and closing

<b>818SW-0020</b>	Single operator for 1 swing leaf with motor-driven opening and closing. Standard profile length L = 463 mm. Leaf maximum weight up to 300 Kg.
<b>818SW-0090</b>	Single operator for 1 swing leaf with motor-driven opening and closing. Maximum profile length cut to measure L = 1000 mm. Leaf maximum weight up to 300 Kg
<b>818SW-0100</b>	Single operator for 1 swing leaf with motor-driven opening and closing. Maximum profile length cut to measure L = 2000 mm. Leaf maximum weight up to 300 Kg
<b>818SW-0110</b>	Single operator for 1 swing leaf with motor-driven opening and closing. Maximum profile length cut to measure L = 3000 mm. Leaf maximum weight up to 300 Kg

### FLUO-SW3 - Operators for 2 swing leaves doors with motor-powered opening and closing

<b>818SW-0120</b>	Single operator for 2 swing leaves with motor-driven opening and closing. Profile length cut to measure L Max. = 2000 mm. Leaf maximum weight up to 300 + 300 Kg.
<b>818SW-0130</b>	Single operator for 2 swing leaves with motor-driven opening and closing. Profile length cut to measure L Max. = 3000 mm. Leaf maximum weight up to 300 + 300 Kg.


### FLUO-SWS2 - Operators for 1 leaf doors with motor-driven opening and spring closing

<b>818SW-0030</b>	Single operator for 1 leaf with spring closing. Standard profile length L = 500 mm. Max leaf weight up to 220 Kg
<b>818SW-0040</b>	Single operator for 1 leaf with spring closing. Maximum profile length cut to measure L = 1000 mm. Leaf maximum weight up to 220 Kg
<b>818SW-0050</b>	Single operator for 1 leaf with spring closing. Maximum profile length cut to measure L = 2000 mm. Leaf maximum weight up to 220 Kg
<b>818SW-0060</b>	Single operator for 1 leaf with spring closing. Maximum profile length cut to measure L = 3000 mm. Leaf maximum weight up to 220 Kg

### FLUO-SWS2 - Operators for doors with 2 swing leaves with motor-driven opening and spring closing

<b>818SW-0070</b>	Double operator for 2 swing leaves with spring closing. Maximum profile length cut to measure L = 2000 mm. Leaf maximum weight up to 220 + 220 Kg
<b>818SW-0080</b>	Double operator for 2 swing leaves with spring closing. Maximum profile length cut to measure L = 3000 mm.< Leaf maximum weight up to 220 + 220 Kg



36 V DC POWERED DEVICE OPERATOR WITH ENCODER

Code	Description
<b>Accessories</b>	
<b>818XC-0038</b> 	Control board for operation during power outages and for recharging the batteries.
<b>818XA-0051</b> 	Board for auxiliary contacts.
<b>Accessories</b>	
<b>818XA-0040</b>	Straight PULL arm.
<b>818XA-0041</b>	Hinged PUSH arm.
<b>818XA-0059</b>	Straight PUSH arm.
<b>818XC-0039</b>	Three-position mechanical function selector.
<b>818XA-0045</b>	17 mm spacer for FLUO-SW.
<b>818XA-0046</b>	34 mm spacer for FLUO-SW.
<b>818XA-0047</b>	51 mm spacer for FLUO-SW.
<b>818XA-0048</b>	68 mm spacer for FLUO-SW.
<b>818XA-0049</b>	85 mm spacer for FLUO-SW.
<b>Accessories for: 818XA-0040</b>	
<b>818XC-0040</b>	11 mm spacer for 818XA-0040.





# DIMENSIONS (mm)

## FLUO-SW2

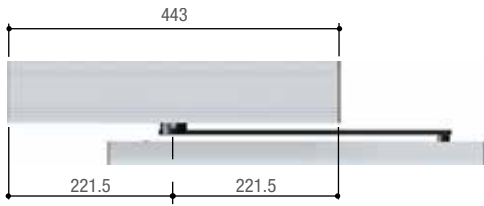



818SW-0010

## FLUO-SWS2

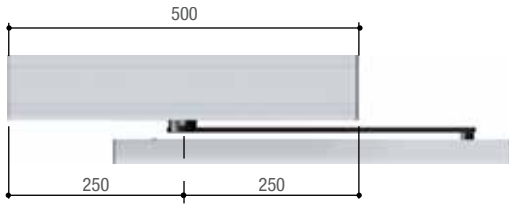

818SW-0030  
818SW-0040  
818SW-0050  
818SW-0060  
818SW-0070  
818SW-0080

## FLUO-SW3

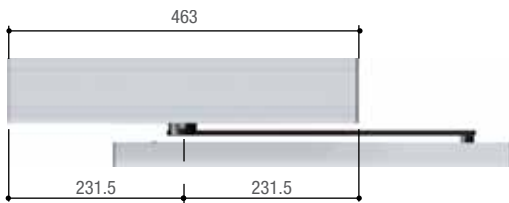


818SW-0020  
818SW-0090  
818SW-0100  
818SW-0110  
818SW-0120  
818SW-0130

# OPERATING LIMITS AND TECHNICAL CHARACTERISTICS


	LIGHT	SPRING	HEAVY
	FLUO-SW2	FLUO-SWS2	FLUO-SW3
Min./max. length of leaf (mm)	800 / 1200	800 / 1200	800 / 1500
Leaf max./min. weight (Kg)	200 / 80	220 / 100	300 / 80
IP protection rating	20	20	20
Power supply (V - 50/60 Hz)	100 - 240 AC	100 - 240 AC	100 - 240 AC
Motor power supply (V)	36 DC	36 DC	36 DC
Nominal power (W)	40	70	70
Stand by nominal power (W)	8	8	8
Maneuvering time 90° (s)	2 to 6	2 to 6	2 to 6
Intermittence/Duty-cycle (%)	CONTINUOUS SERVICES	CONTINUOUS SERVICES	CONTINUOUS SERVICES
Nominal load (N)	20	23	40
Operating temperature (°C)	-15 to +50	-15 to +50	-15 to +50

● 36 V DC


## FLUO-SW2 - LIGHT



## FLUO-SWS2 - SPRING



## FLUO-SW3 - HEAVY





SPOGLIATOIO

### **SUITABLE FOR ALL TYPES OF DOORS**

FLUO-SW does not require a particular type of door to be installed, it is sufficient that the door is of good manufacture, made of wood, aluminium or plastic material. For the operator wall mounting it is essential to use suitable fastening systems based on the constructive nature of the support.

# AUTOMATIC SLIDING DOORS

**TYPE**

**BASIC**

**FEATURES**

**TELESCOPIC**

**HEAVY**

**MAGNUM**

**CAME** 

[CAME.COM](https://www.came.com)





**EMERGENCY  
VERSIONS**

**FOR 1 LEAF  
UP TO 100 KG**

**FOR 2 LEAVES UP  
TO 90 KG EACH**

**FLUO-SLB**

**FLUO-SLBE**

**FOR 1 LEAF  
UP TO 140 KG**

**FOR 2 LEAVES UP  
TO 120 KG EACH**

**FLUO-SLS**

**FLUO-SLE**

**FOR 2 LEAVES UP  
TO 100 KG EACH**

**FOR 4 LEAVES UP  
TO 70 KG EACH**

**FLUO-SLT**

**FLUO-SLTE**

**FOR 1 LEAF  
UP TO 180 KG**

**FOR 2 LEAVES UP  
TO 150 KG EACH**

**FLUO-SLH**

**FOR 1 LEAF  
UP TO 400 KG**


**FOR 2 LEAVES UP  
TO 250 KG EACH**

**FLUO-SLM**


# SLIDING DOORS: STANDARD INSTALLATIONS

**1 SLIDING LEAF + 1 FIXED LEAF  
OPENING TOWARDS THE RIGHT**

**1 SLIDING LEAF + 1 FIXED LEAF  
OPENING TOWARDS THE LEFT**

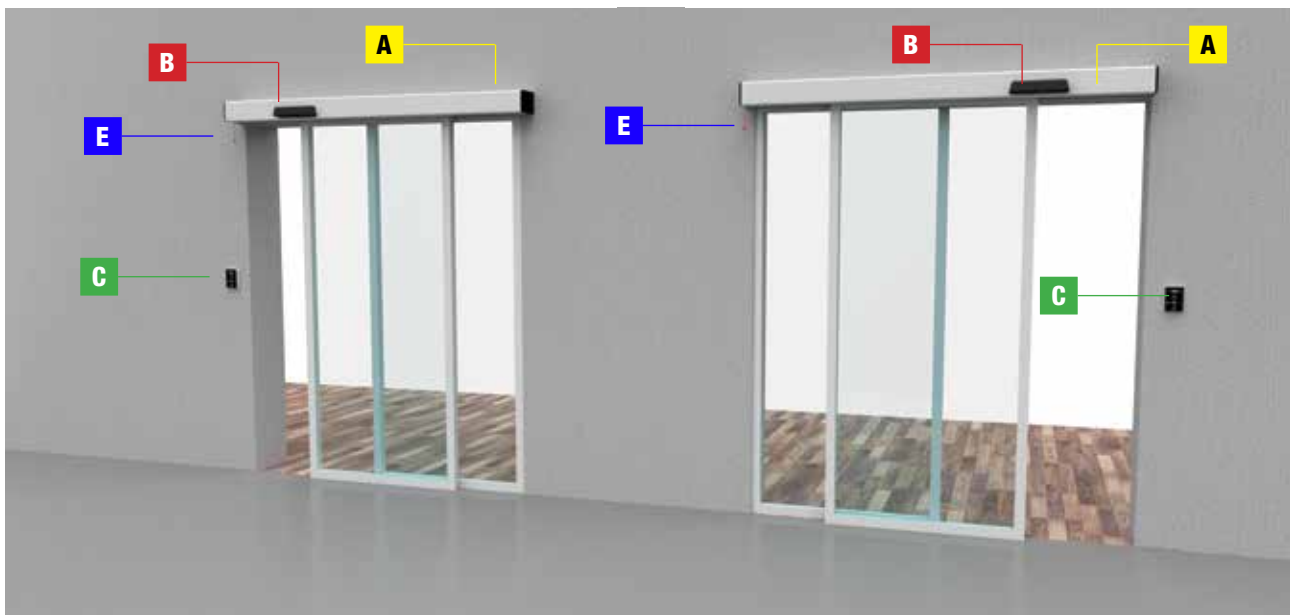

**2 SLIDING LEAVES + 2 FIXED LEAVES**

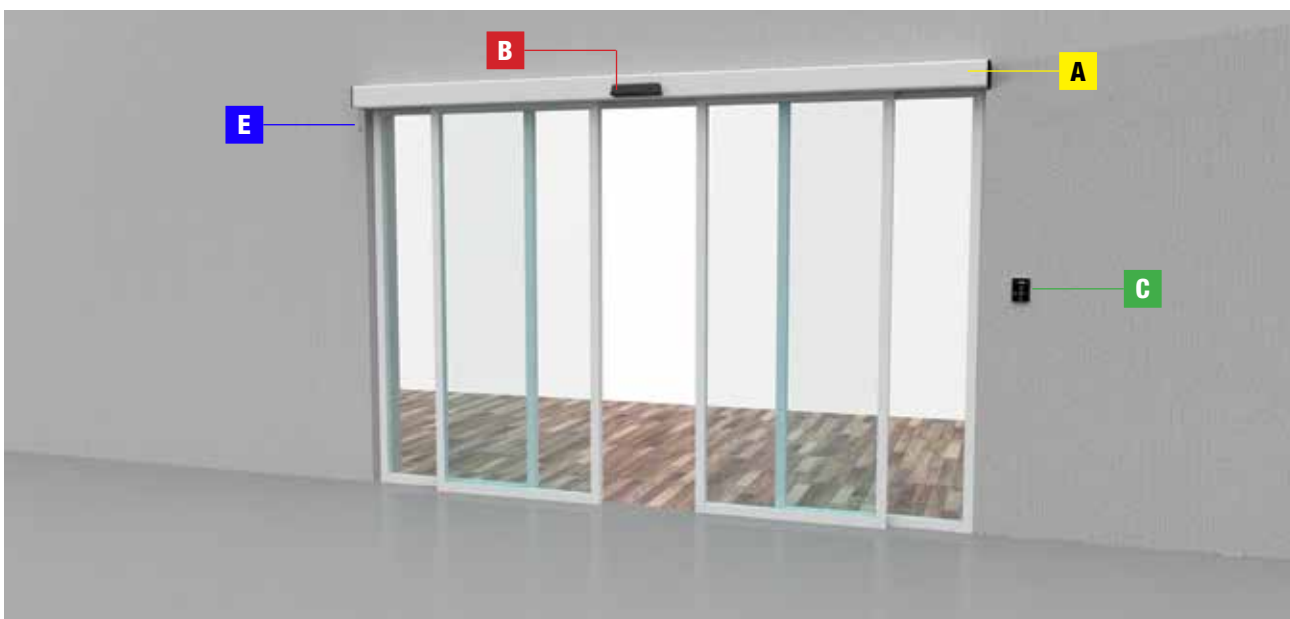

**A**

- Operator (control board-fitted gearmotor)
- Power outage emergency operation board.
- Control panel

**B**

- Indoor / outdoor sensor

**C**

- Functions selector

**E**

- Cord control for mechanical release


**NOTE**

Fixed leaves are elements that are not always present and in any case they are not fundamental.


## TELESCOPIC DOORS: STANDARD INSTALLATIONS

### 2 TELESCOPIC LEAVES + 1 FIXED LEAF OPENING TOWARDS THE RIGHT

### 2 TELESCOPIC LEAVES + 1 FIXED LEAF OPENING TOWARDS THE LEFT

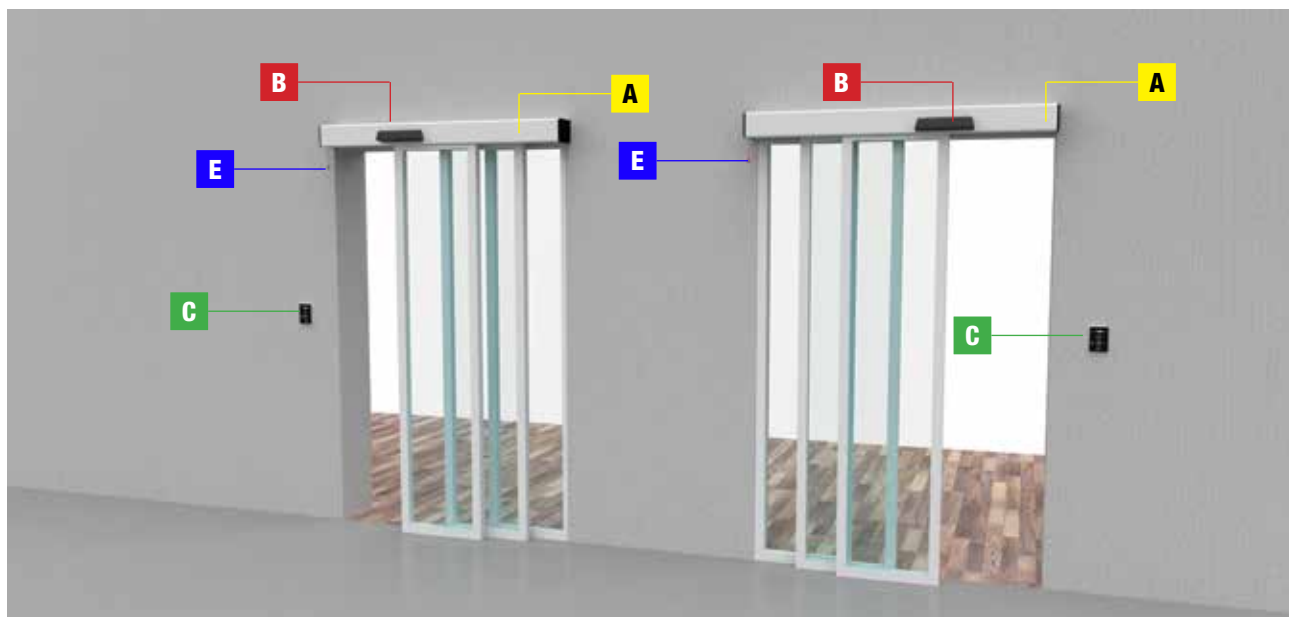

### 4 TELESCOPIC LEAVES

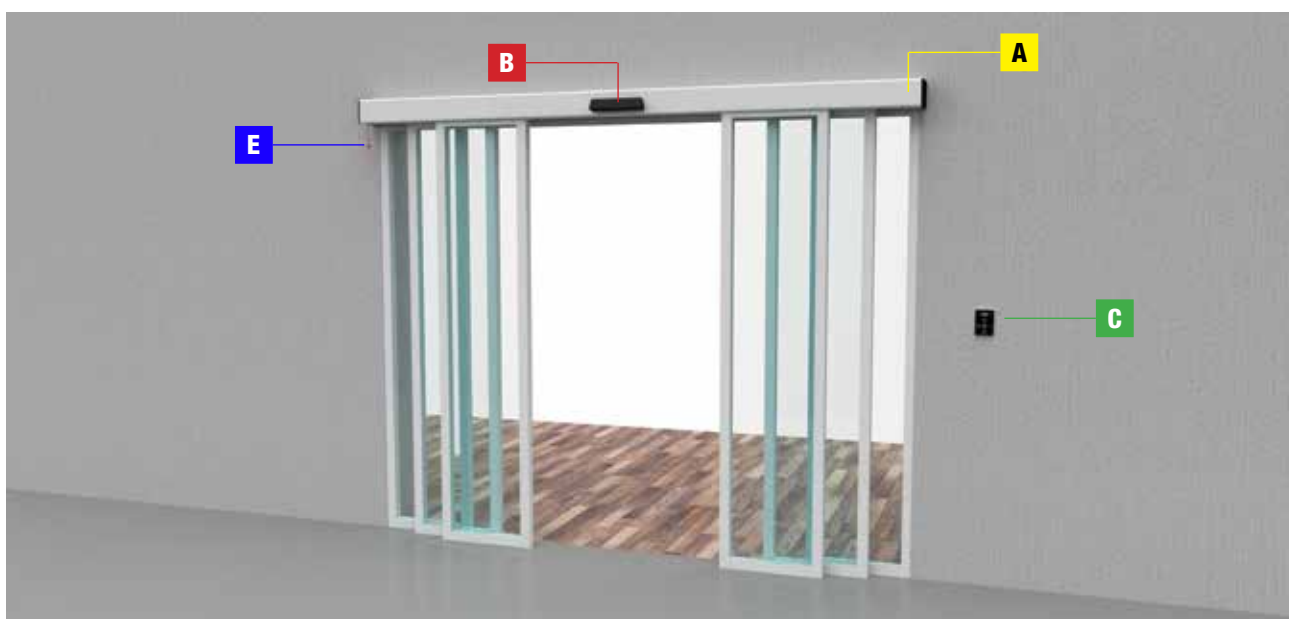

## CABLES FOR STANDARD INSTALLATION

CABLE LENGTH (m)	< 10	from 10 to 20	from 20 to 30
230 V AC Power supply	3G x 1.5 mm <sup>2</sup>	3G x 1.5 mm <sup>2</sup>	3G x 2.5 mm <sup>2</sup>
Functions selector 818XA-0043 - 818XA-0050	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted	UTP CAT 4 AWG24 - 4 x 0.5 mm <sup>2</sup> Bipolar twisted
12 - 24 V AC - DC touch sensors	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>	4 x 1 mm <sup>2</sup>
Command and control devices	*n° x 0.5 mm <sup>2</sup>	*n° x 0.5 mm <sup>2</sup>	*n° x 0.5 mm <sup>2</sup>

\*no. = see product mounting instructions -

## BEAM DIMENSIONS (mm)

FLUO-SLB  
 FLUO-SLBE  
 FLUO-SLS  
 FLUO-SLE  
 FLUO-SLH  
 FLUO-SLM

# BASIC STANDARD HEAVY MAGNUM

Ld = LENGTH OF OPERATOR


La = PASSAGE WIDTH

Lm = LEAF WIDTH

Loo = LEAF OVERLAPPING OPEN SIDE (depends on the type of door/gate)

Loc = LEAF OVERLAPPING CLOSE SIDE (depends on the type of door/gate)

### 1 SLIDING DOOR WITH RIGHT OR LEFT OPENING

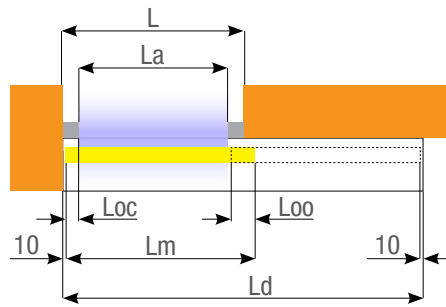


$$Ld = La + Lm + Loc + 20 \text{ OPERATOR LENGTH}$$

$$La = Lm - Loc - Loo \text{ PASSAGE WIDTH}$$

$$Lm = La + Loc + Loo \text{ LEAF WIDTH}$$

### TWO SLIDING LEAVES

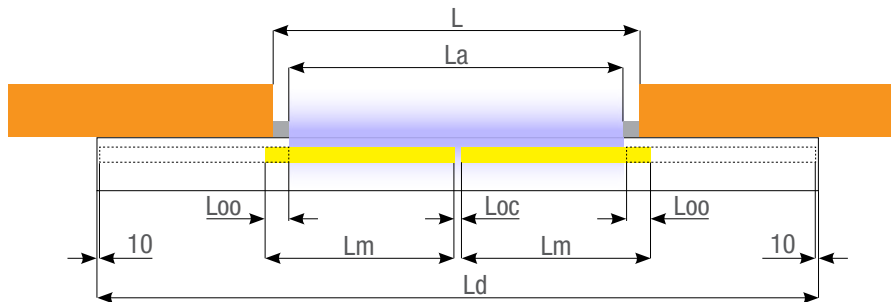

$$Ld = La + 2Lm + 20 \text{ OPERATOR LENGTH}$$

$$La = 2Lm - Loc - 2Loo \text{ PASSAGE WIDTH}$$


$$Lm = (La - Loc + 2Loo) / 2 \text{ LEAF WIDTH}$$

FLUO-SLT  
FLUO-SLTE

# TELESCOPIC

- MASONRY
- MOVEMENT OVERALL DIMENSIONS
- OPERATOR PROFILE
- MOVING LEAF/LEAVES
- PASSAGE COMPARTMENT

## 2 TELESCOPIC LEAFS WITH RIGHT OR LEFT OPENING

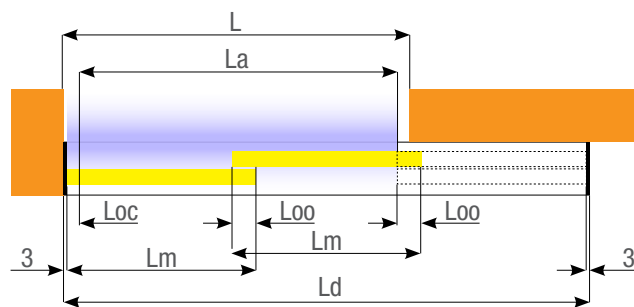


$$Ld = La + 2Lm + 6 \text{ OPERATOR LENGTH}$$

$$La = 2Lm + Loc - 2Loo \text{ PASSAGE WIDTH}$$

$$Lm = (La - Loc + 2Loo) / 2 \text{ LEAF WIDTH}$$

## 4 TELESCOPIC LEAVES

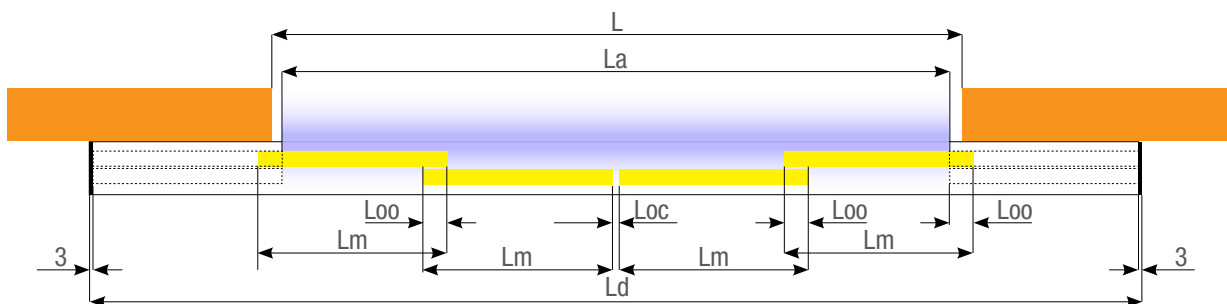

$$Ld = La + 2Lm + 6 \text{ OPERATOR LENGTH}$$


$$La = 4Lm + Loc - 4Loo \text{ PASSAGE WIDTH}$$

$$Lm = (La - Loc + 4Loo) / 4 \text{ LEAF WIDTH}$$

# BEAM SECTION scale 1: 2 (mm)


FLUO-SLB  
FLUO-SLBE

## BASIC

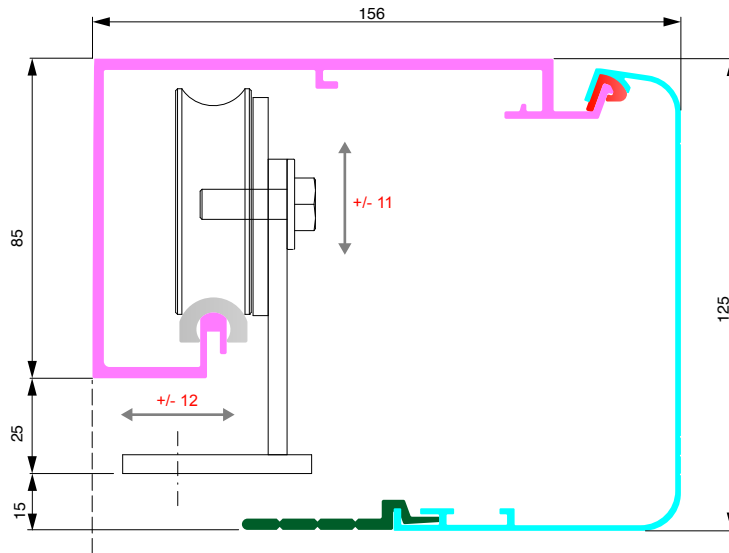


FLUO-SLS  
FLUO-SLE  
FLUO-SLH  
FLUO-SLM

## STANDARD HEAVY MAGNUM

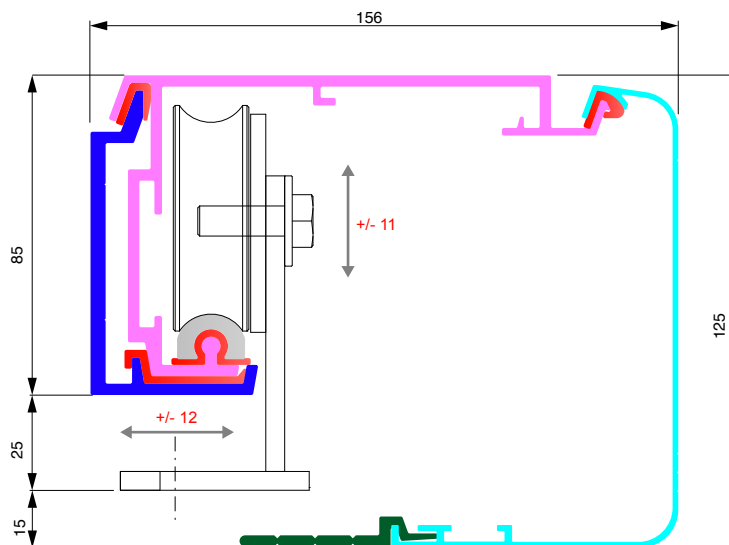

FLUO-SLT  
FLUO-SLTE

# TELESCOPIC

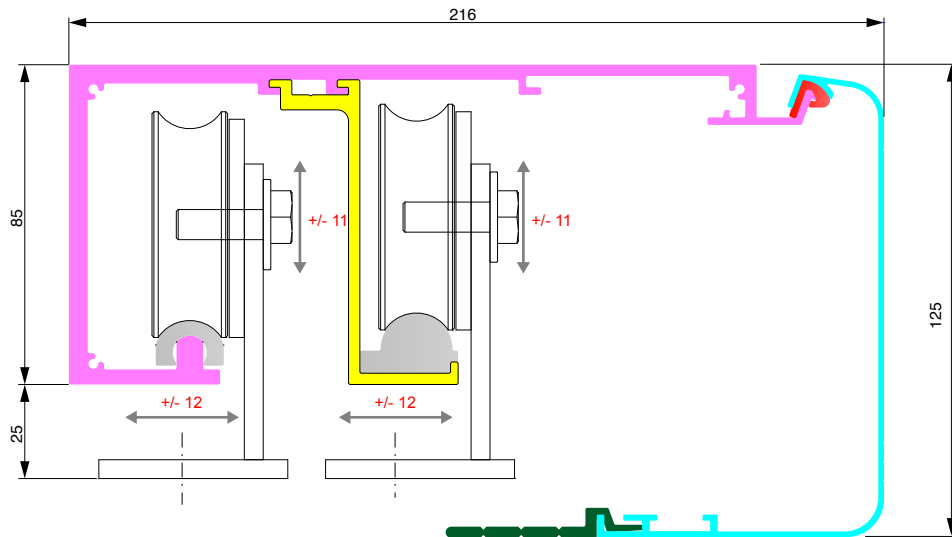

- BEAM PROFILE
- ANTI-VIBRATING PROFILES
- COVERING CARTER PROFILE
- CASING CLOSING GASKET
- BEAM COUPLING PROFILE
- SECOND LEAF CONNECTION PROFILE

# FLUO-SL

Extremely silent door thanks to the brushless DC motor.

Also available in the "EMERGENCY" version for special installations.

The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes.

The great advantage of FLUO-SLE consists in being able to install, in emergency routes and exits, operators approved for this purpose, with standard sliding leaves, to replace the traditional operators with sliding push-to-open leafs, in the direction of emergency exit.





## A HI-TECH SYSTEM FOR LIMITED SPACES

### A COMPLETE SOLUTION

- Low consumption, thanks to the Brushless motor with direct drive technology.
- Very silent during movement.
- Power supply switching from 100 to 240 V 50/60 Hz.
- High performance with doors up to 400 Kg.
- Assembly kit available for quick installation.

### INNOVATIVE ELECTRONIC CONTROL UNIT

- Pre-configured board for standard installations, without the need to set additional parameters.
- Fully customizable configurations for specific installations.
- Parameters setting and monitoring through alphanumeric display.
- Backup system through Micro SD board.
- Board with dedicated connectors for each individual accessory.
- Obstacle detection.

### EMERGENCY EXITS

- EMERGENCY version available for emergency exits installation.
- Compatible with the 818XG-0016 sensor and with the 818XA-0043 digital selector + 001TSTM1 badge transponder, this solution complies with international regulations for emergency exits and is TUV certified (check the national and local limits).

# FLUO-SL BASIC

FLUO-SLB  
FLUO-SLBE

1 LEAF UP TO  
100 KG

2 LEAVES UP TO  
90 KG EACH



## Code Description

### Complete operators with Brushless motor

**818SL-0050 / 59** Complete operator for door with one moving leaf.



**818SL-0060 / 69** Complete operator for door with two moving leaves.



### Complete operators with Brushless motor, EMERGENCY version

**818SL-0070 / 79** Complete operator for door with one moving leaf, with EMERGENCY function.



**818SL-0080 / 89** Complete operator for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

42 V DC POWERED DEVICE OPERATOR WITH ENCODER

## FLUO-SLB ASSEMBLED OPERATORS

FLUO-SLB 1 LEAF	OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLB 2 LEAVES	OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0050	2000	925	1015	818SL-0060	2000	940	2 x 520
818SL-0051	2200	1025	1115	818SL-0061	2200	1040	2 x 570
818SL-0052	2600	1225	1315	818SL-0062	2600	1240	2 x 670
818SL-0053	3000	1425	1515	818SL-0063	3000	1440	2 x 770
818SL-0054	3300	1575	1665	818SL-0064	3300	1590	2 x 845
818SL-0055	3600	1725	1815	818SL-0065	3600	1740	2 x 920
818SL-0056	4000	1925	2015	818SL-0066	4000	1940	2 x 1020
818SL-0057	4400	2125	2215	818SL-0067	4400	2140	2 x 1120
818SL-0058	5000	2425	2515	818SL-0068	5000	2440	2 x 1270
818SL-0059	6600	3225	3315	818SL-0069	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLBE ASSEMBLED OPERATORS WITH EMERGENCY FUNCTION

FLUO-SLBE 1 LEAF	OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLBE 2 LEAVES	OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0070	2000	925	1015	818SL-0080	2000	940	2 x 520
818SL-0071	2200	1025	1115	818SL-0081	2200	1040	2 x 570
818SL-0072	2600	1225	1315	818SL-0082	2600	1240	2 x 670
818SL-0073	3000	1425	1515	818SL-0083	3000	1440	2 x 770
818SL-0074	3300	1575	1665	818SL-0084	3300	1590	2 x 845
818SL-0075	3600	1725	1815	818SL-0085	3600	1740	2 x 920
818SL-0076	4000	1925	2015	818SL-0086	4000	1940	2 x 1020
818SL-0077	4400	2125	2215	818SL-0087	4400	2140	2 x 1120
818SL-0078	5000	2425	2515	818SL-0088	5000	2440	2 x 1270
818SL-0079	6600	3225	3315	818SL-0089	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY operator applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)

**Code**                      **Description**

**Kit for assembling BASIC • FLUO-SLB sliding doors**

**8K18SL-003**                      FLUO-SLB complete operator kit for doors with one moving leaf.

**Kit for assembling BASIC • FLUO- SLBE sliding doors EMERGENCY version**

**8K18SL-004**                      FLUO-SLBE complete operator kit for doors with one moving leaf.

**Accessory for assembling BASIC sliding doors**

**818XA-0030**                      Second leaf operator kit for FLUO-SLB and FLUO-SLE doors.

NOTES:  
 System completion accessories see page 48.



The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, operators approved for this purpose, with standard sliding leaves, to replace the traditional operators with sliding push-to-open leaves, in the direction of emergency exit.

**OPERATING LIMITS AND TECHNICAL CHARACTERISTICS**

	BASIC				EMERGENCY			
	FLUO-SLB		FLUO-SLB		FLUO-SLBE		FLUO-SLBE	
	1 LEAF		2 LEAVES		1 LEAF		2 LEAVES	
Min./max. length of leaf (mm)	1015	3015	520	1670	1015	3015	520	1670
Max leaf weight (kg)	100		90 + 90		100		90 + 90	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20		20	
Power supply (V - 50/60 Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	<b>0.8</b>		<b>1.6</b>		<b>0.8</b>		<b>1.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SL STANDARD

FLUO-SLS  
FLUO-SLE

1 LEAF UP TO  
140 KG

2 LEAVES UP TO  
120 KG EACH



## Code Description

### Complete operators with Brushless motor

**818SL-0020 / 29** Complete operator for door with one moving leaf.



**818SL-0040 / 49** Complete operator for door with two moving leaves.



### Complete operators with Brushless motor, EMERGENCY version

**818SL-0010 / 19** Complete operator for door with one moving leaf, with EMERGENCY function.



**818SL-0030 / 39** Complete operator for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

42 V DC POWERED DEVICE OPERATOR WITH ENCODER

## FLUO-SLS ASSEMBLED OPERATORS

FLUO-SLS 1 LEAF	OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLS 2 LEAVES	OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0020	2000	925	1015	818SL-0040	2000	940	2 x 520
818SL-0021	2200	1025	1115	818SL-0041	2200	1040	2 x 570
818SL-0022	2600	1225	1315	818SL-0042	2600	1240	2 x 670
818SL-0023	3000	1425	1515	818SL-0043	3000	1440	2 x 770
818SL-0024	3300	1575	1665	818SL-0044	3300	1590	2 x 845
818SL-0025	3600	1725	1815	818SL-0045	3600	1740	2 x 920
818SL-0026	4000	1925	2015	818SL-0046	4000	1940	2 x 1020
818SL-0027	4400	2125	2215	818SL-0047	4400	2140	2 x 1120
818SL-0028	5000	2425	2515	818SL-0048	5000	2440	2 x 1270
818SL-0029	6600	3225	3315	818SL-0049	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLSE ASSEMBLED OPERATORS WITH EMERGENCY FUNCTION

FLUO-SLE 1 LEAF	OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH	FLUO-SLE 2 LEAVES	OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0010	2000	925	1015	818SL-0030	2000	940	2 x 520
818SL-0011	2200	1025	1115	818SL-0031	2200	1040	2 x 570
818SL-0012	2600	1225	1315	818SL-0032	2600	1240	2 x 670
818SL-0013	3000	1425	1515	818SL-0033	3000	1440	2 x 770
818SL-0014	3300	1575	1665	818SL-0034	3300	1590	2 x 845
818SL-0015	3600	1725	1815	818SL-0035	3600	1740	2 x 920
818SL-0016	4000	1925	2015	818SL-0036	4000	1940	2 x 1020
818SL-0017	4400	2125	2215	818SL-0037	4400	2140	2 x 1120
818SL-0018	5000	2425	2515	818SL-0038	5000	2440	2 x 1270
818SL-0019	6600	3225	3315	818SL-0039	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY operator applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)

## Code Description

### Kit for assembling STANDARD • FLUO-SLS sliding doors

**8K18SL-001** FLUO-SLS complete operator kit for doors with one moving leaf.



### Kit for assembling STANDARD • FLUO- SLE sliding doors EMERGENCY version

**8K18SL-002** FLUO-SLE complete operator kit for doors with one moving leaf.



### Accessory for assembling STANDARD sliding doors

**818XA-0024** Second leaf operator kit for FLUO-SLS and FLUO-SLE doors.

#### NOTES:

System completion accessories see page 48.



The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes. The great advantage of FLUO EMERGENCY consists in being able to install, in emergency routes and exits, operators approved for this purpose, with standard sliding leaves, to replace the traditional operators with sliding push-to-open leaves, in the direction of emergency exit.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	STANDARD				EMERGENCY			
	FLUO-SLS		FLUO-SLS		FLUO-SLE		FLUO-SLE	
	1 LEAF		2 LEAVES		1 LEAF		2 LEAVES	
<b>Min./max. length of leaf (mm)</b>	1015	3315	520	1670	1015	3315	520	1670
<b>Max leaf weight (kg)</b>	100		90 + 90		100		90 + 90	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20		20	
Power supply (V - 50/60 Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	<b>0.8</b>		<b>1.6</b>		<b>0.8</b>		<b>1.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SL HEAVY

FLUO-SLH

1 LEAF UP TO  
180 KG

2 LEAVES UP TO  
150 KG EACH



## Code Description

### Complete operators with Brushless motor

**818SL-0090 / 99** Complete operator for door with one moving leaf.



**818SL-0100 / 109** Complete operator for door with two moving leaves.



#### NOTES:

System completion accessories see page 48.

 42 V DC POWERED DEVICE  OPERATOR WITH ENCODER

## FLUO-SLH ASSEMBLED OPERATORS

FLUO-SLH 1 LEAF				FLUO-SLH 2 LEAVES			
CODE	OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH	CODE	OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH
	Ld (mm)	La (mm)	Lm (mm)		Ld (mm)	La (mm)	Lm (mm)
818SL-0090	2000	925	1015	818SL-0100	2000	940	2 x 520
818SL-0091	2200	1025	1115	818SL-0101	2200	1040	2 x 570
818SL-0092	2600	1225	1315	818SL-0102	2600	1240	2 x 670
818SL-0093	3000	1425	1515	818SL-0103	3000	1440	2 x 770
818SL-0094	3300	1575	1665	818SL-0104	3300	1590	2 x 845
818SL-0095	3600	1725	1815	818SL-0105	3600	1740	2 x 920
818SL-0096	4000	1925	2015	818SL-0106	4000	1940	2 x 1020
818SL-0097	4400	2125	2215	818SL-0107	4400	2140	2 x 1120
818SL-0098	5000	2425	2515	818SL-0108	5000	2440	2 x 1270
818SL-0099	6600	3225	3315	818SL-0109	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

**Code**                      **Description**

**Kit for assembling HEAVY • FLUO-SLH sliding doors**

<b>8K18SL-006</b>	FLUO-SLH complete operator kit for doors with one moving leaf.
-------------------	--

**Accessory for assembling HEAVY sliding doors**

<b>818XA-0060</b>	Second leaf operator kit for and FLUO-SLH doors.
-------------------	--



FLUO-SL HEAVY operators are ideal for applications on medium and large doors/leaves, for intensive use such as in supermarkets, shopping malls, public offices.

**OPERATING LIMITS AND TECHNICAL CHARACTERISTICS**

	HEAVY			
	FLUO-SLH		FLUO-SLH	
	1 LEAF		2 LEAVES	
<b>Min./max. length of leaf (mm)</b>	1015	3315	520	1670
<b>Max leaf weight (kg)</b>	180		150 + 150	
IP protection rating	20		20	
Power supply (V - 50/60 Hz)	100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70	
Stand by nominal power (W)	10		10	
Maximum operating speed (m/s)	<b>0.6</b>		<b>1.2</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150	
Operating temperature (°C)	-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SLM MAGNUM

FLUO-SLM

1 LEAF UP TO 400  
KG

2 LEAVES UP TO  
250 KG EACH



## Code Description

### Complete operators with Brushless motor

**818SL-0130 / 139** Complete operator for door with one moving leaf.



**818SL-0140 / 147** Complete operator for door with two moving leaves.



#### NOTES:

System completion accessories see page 48.

 42 V DC POWERED DEVICE  OPERATOR WITH ENCODER

## FLUO-SLM ASSEMBLED OPERATORS

FLUO-SLM 1 LEAF				FLUO-SLM 2 LEAVES			
OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH		OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH	
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818SL-0130	2000	925	1015	-	-	-	-
818SL-0131	2200	1025	1115	-	-	-	-
818SL-0132	2600	1225	1315	818SL-0140	2600	1240	2 x 670
818SL-0133	3000	1425	1515	818SL-0141	3000	1440	2 x 770
818SL-0134	3300	1575	1665	818SL-0142	3300	1590	2 x 845
818SL-0135	3600	1725	1815	818SL-0143	3600	1740	2 x 920
818SL-0136	4000	1925	2015	818SL-0144	4000	1940	2 x 1020
818SL-0137	4400	2125	2215	818SL-0145	4400	2140	2 x 1120
818SL-0138	5000	2425	2515	818SL-0146	5000	2440	2 x 1270
818SL-0139	6600	3225	3315	818SL-0147	6600	3240	2 x 1670

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)



Kit for assembling MAGNUM • FLUO-SLM sliding doors

**8K18SL-007**

FLUO-SLM complete operator kit for doors with one moving leaf.



FLUO-SL MAGNUM operators are specifically designed for applications on heavy and large doors/leafs.

It is typically used in combination with armoured doors, with shatter-proof glass as those in bank branches.

## OPERATING LIMITS AND TECHNICAL CHARACTERISTICS

	MAGNUM			
	FLUO-SLM 1 LEAF		FLUO-SLM 2 LEAVES	
Min./max. length of leaf (mm)	1015	3315	670	1670
Max leaf weight (kg)	400		250 + 250	
IP protection rating	20		20	
Power supply (V - 50/60 Hz)	100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70	
Stand by nominal power (W)	10		10	
Maximum operating speed (m/s)	0.3		0.6	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150	
Operating temperature (°C)	-15 to +50		-15 to +50	

● 42 V DC

# FLUO-SLT TELESCOPIC

FLUO-SLT  
FLUO-SLTE

2 LEAVES UP TO  
100 KG EACH

4 LEAVES UP TO  
70 KG EACH



## Code Description

### Complete operators with Brushless motor

**818ST-0010 / 20** Complete operator for door with one moving leaf.



**818ST-0021 / 27** Complete operator for door with two moving leaves.



### Complete operators with Brushless motor and EMERGENCY function

**818ST-0030 / 40** Complete operator for door with one moving leaf, with EMERGENCY function.



**818ST-0041 / 47** Complete operator for door with two moving leaves, with EMERGENCY function.



#### NOTES:

System completion accessories see page 48.

42 V DC POWERED DEVICE OPERATOR WITH ENCODER

## FLUO-SLT ASSEMBLED OPERATORS

FLUO-SLT 2 LEAVES				FLUO-SLT 4 LEAVES			
OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH		OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH	
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818ST-0010	1800	1122	2 x 631	-	-	-	-
818ST-0011	2000	1256	2 x 698	-	-	-	-
818ST-0012	2200	1389	2 x 764	-	-	-	-
818ST-0013	2600	1656	2 x 898	-	-	-	-
818ST-0014	3000	1922	2 x 1031	818ST-0021	3000	1929	4 x 532
818ST-0015	3300	2122	2 x 1131	818ST-0022	3300	2129	4 x 582
818ST-0016	3600	2322	2 x 1231	818ST-0023	3600	2329	4 x 632
818ST-0017	4000	2589	2 x 1364	818ST-0024	4000	2596	4 x 699
818ST-0018	4400	2856	2 x 1498	818ST-0025	4400	2896	4 x 765
818ST-0019	5000	3256	2 x 1698	818ST-0026	5000	3262	4 x 865
818ST-0020	6600	4322	2 x 2231	818ST-0027	6600	4329	4 x 1132

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

## FLUO-SLTE ASSEMBLED OPERATORS WITH EMERGENCY FUNCTION

FLUO-SLTE 2 LEAVES				FLUO-SLTE 4 LEAVES			
OPERATOR LENGTH	PASSAGE WIDTH	LEAF WIDTH		OPERATOR LENGTH	PASSAGE WIDTH	LEAVES WIDTH	
CODE	Ld (mm)	La (mm)	Lm (mm)	CODE	Ld (mm)	La (mm)	Lm (mm)
818ST-0030	1800	1122	2 x 631	-	-	-	-
818ST-0031	2000	1256	2 x 698	-	-	-	-
818ST-0032	2200	1389	2 x 764	-	-	-	-
818ST-0033	2600	1656	2 x 898	-	-	-	-
818ST-0034	3000	1922	2 x 1031	818ST-0041	3000	1929	4 x 532
818ST-0035	3300	2122	2 x 1131	818ST-0042	3300	2129	4 x 582
818ST-0036	3600	2322	2 x 1231	818ST-0043	3600	2329	4 x 632
818ST-0037	4000	2589	2 x 1364	818ST-0044	4000	2596	4 x 699
818ST-0038	4400	2856	2 x 1498	818ST-0045	4400	2896	4 x 765
818ST-0039	5000	3256	2 x 1698	818ST-0046	5000	3262	4 x 865
818ST-0040	6600	4322	2 x 2231	818ST-0047	6600	4329	4 x 1132

The values shown are calculated considering Loo = 50 mm and Loc = 40 mm)

The values shown are calculated considering Loo = 50 mm and Loc = 0 mm)

#### NOTES:

In EMERGENCY operator applications always consider the appropriate choice of control and safety devices (SEE TECHNICAL MANUAL)

**Code**                      **Description**

<b>Kit for assembling TELESCOPIC • FLUO-SLT sliding doors</b>	
<b>8K18ST-001</b>	FLUO-SLT complete operator kit for doors with 2 moving leaves.
<b>Kit for assembling TELESCOPIC • FLUO-SLTE sliding doors EMERGENCY version</b>	
<b>8K18ST-002</b>	FLUO-SLTE complete operator kit for doors with 2 moving leaves.
<b>Accessory for assembling TELESCOPIC sliding doors</b>	
<b>818XA-0033</b>	Second leaf operator kit for FLUO-SLT and FLUO-SLTE doors.



FLUO-SL TELESCOPIC operators solve the problem of limited space. In fact, with telescopic doors/windows it is possible to obtain the maximum passage width.

**OPERATING LIMITS AND TECHNICAL CHARACTERISTICS**

	TELESCOPIC				EMERGENCY			
	FLUO-SLT		FLUO-SLT		FLUO-SLTE		FLUO-SLTE	
	2 LEAVES		4 LEAVES		2 LEAVES		4 LEAVES	
<b>Min./max. length of leaf (mm)</b>	631	2231	532	1132	631	2231	520	1520
<b>Max leaf weight (kg)</b>	100 + 100		70 + 70 + 70 + 70		100 + 100		70 + 70 + 70 + 70	
Certification	TÜV Thüringen		TÜV Thüringen		TÜV Thüringen		TÜV Thüringen	
IP protection rating	20		20		20			
Power supply (V - 50/60 Hz)	100 - 240 AC		100 - 240 AC		100 - 240 AC		100 - 240 AC	
Nominal power (W)	70		70		70		70	
Stand by nominal power (W)	10		10		10		10	
Maximum operating speed (m/s)	<b>0.8</b>		<b>1.6</b>		<b>0.8</b>		<b>1.6</b>	
Intermittence/Duty-cycle (%)	CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION		CONTINUOUS OPERATION	
Nominal load (N)	150		150		150		150	
Operating temperature (°C)	-15 to +50		-15 to +50		-15 to +50		-15 to +50	

● 42 V DC

# ACCESSORIES FOR AUTOMATIC DOORS

**CAME** 

[CAME.COM](http://CAME.COM)



**Metro**  
**Subway**  
**Metro**



# ACCESSORIES

## SLIDING OPERATORS COMPLETION

### Accessories for completing the sliding doors (ALL SERIES)

**818XC-0012**



Bistable electric lock complete with cord and release lever.

**818XC-0015**



Leaf position alert device

**818XC-0016**



Casing fastening device.

**818XC-0017**



Sensor fastening device.

**818XC-0014**



Built-in lever release kit.

**818XC-0029**



Lock device on the return

**818XA-0037**



Support for SMALL opening and safety sensors.

**818XC-0036**



Magnetic block for FLUO-SL series.

**818XC-0035**



Lock device on the winder (assembled).

### Accessories for: 818XC-0012

**818XC-0013**



Electric lock position alert kit

### Accessories for SLIDING OPERATORS

**818XA-0051**



Board for auxiliary contact.

### Power outage emergency operation boards

**818XC-0010**



Board for operating during power outages and for recharging the batteries, complete with brace 2 x 12 V - 2 Ah batteries

**818XC-0011**







Board for operating during power outages and for recharging the batteries, complete with brace 2 x 12 V - 5.4 Ah batteries



# ACCESSORIES

## PROFILES FOR SLIDING OPERATORS IN KIT






### Profiles and gaskets for completing the ALL SERIES sliding doors

<b>818XA-0018</b>	<b>818XA-0019</b>	<b>818XA-0053</b>	<b>818XA-0014</b>
			
Casing gasket, 40 m. reel.	Casing lower gasket, 40 m. reel.	Rough casing profile, length 6620 mm.	Anodized casing profile, length 6620 mm.




### Profiles for completing the BASIC sliding doors

<b>818XA-0034</b>	<b>818XA-0023</b>
	
Rough box profile, length 6620 mm.	Anodized rail-frame, length 6620 mm.

### Profiles for completing the STANDARD- HEAVY- MAGNUM sliding doors

<b>818XA-0012</b>	<b>818XA-0017</b>	<b>818XA-0021</b>	<b>818XA-0016</b>	<b>818XA-0015</b>
				
Anodized front profile, length 6620 mm.	Gasket for front profile, 40 m. reel	Anodized rear profile, length 6620 mm.	Gasket for rear profile, 40 m. reel	Gasket for guide, 40 m. reel.

### Profiles for completing the TELESCOPIC sliding doors

<b>818XA-0032</b>	<b>818XA-0023</b>	<b>818XA-0035</b>
		
Rough box profile, length 6620 mm.	Anodized rail-frame, length 6620 mm.	Anodized rail-frame, length 6620 mm.





### Transmission belt



<b>818XA-0010</b>



Transmission belt, 50 m reel


# ACCESSORIES

## CONTROL AND SAFETY

Recess-mounted micro-photocells	Selectors and accessories		
<b>818XC-0026</b>	<b>818XA-0043</b>	<b>818XA-0050</b>	<b>001TSTM1</b>
			
Pair of recess-mounted 24 V AC- DC infrared photocells, complete with shielded 5 m cable, Range15 m.	Functions selector with RFID.	BASIC functions selector.	ISO MIFARE Classic 1 K board - 13.56 MHz for 818XA-0043

Microwave OPENING radar	
<b>818XG-0017</b>	<b>818XG-0018</b>
	
<b>MR8106</b> Volumetric unidirectional - bidirectional microwave radar 12 - 24 V AC - DC. - Maximum application height 4 m - Detection area: LARGE ANTENNA field depth = 2 m and field width 4 m STRAIGHT ANTENNA field depth = 2.5 m and field width 2 m (In unidirectional mode, it is activated with approaching movement). - Adjustment with 001MRT001 remote control.	<b>MR8107</b> Bidirectional, microwave, volumetric radar, 12 - 24 V AC-DC.< V AC-DC. - Maximum application height 3 m - Detection area: field depth = 2 m and field width 4 m field depth = 2.5 m and field width 2 m. - Manual adjustment.

Microwave OPENING radar accessories	
<b>818XG-0020</b>	<b>818XG-0019</b>
	
<b>001MRWPC</b> Rain cap for microwave volumetric radars.	<b>MRT001</b> Remote control for microwave, volumetric radars.

Touch-sensitive sensors
<b>818XG-0021</b>

<b>001MS9502</b> Volumetric touch sensor 12 - 24 V AC - DC with microwave reflection. Detection field: from 0.1 to 0.5 m.



Active infrared OPENING and SECURITY radar

**818XG-0014**



**001MR8003**  
 12 - 24 V AC- DC adjustable-field radar.  
 - Maximum application height 3 m  
 - Detection area: field depth = 0.41 - 1.77 m, field width 3.1 m.

Dual technology OPENING and SAFETY radar

OPENING and SAFETY radar for EMERGENCY operators

**818XG-0015**



**001MR8204**  
 12 - 30 V DC - 5% + 10% opening and safety radar  
 - Application height: 1,8 ÷ 3 m.  
 - Adjustable detection area.

**818XG-0016**



**001MR8700**  
 12 - 24 V AC-DC control and safety radar  
 (To be installed exclusively in the exit direction).  
 - Application height: 2 ÷ 3.5 m  
 - Adjustable detection area

Active infrared OPENING and SAFETY radar

**818XG-0011**



**0011MR8534**  
 Safety radar for automatic swing doors \*L = 340 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3,5 m.  
 - Adjustable detection area.

**818XG-0012**



**0011MR8570**  
 Safety radar for automatic swing doors \*L = 700 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3,5 m.  
 - Adjustable detection area.

**818XG-0013**



**0011MR8590**  
 Safety radar for automatic swing doors \*L = 900 mm with backdrop suppression 12 - 24 V AC ± 10% / 12 - 30 V DC - 5% + 10%.  
 - Application height: 1,3 ÷ 3,5 m.  
 - Adjustable detection area.

Active infrared SECURITY radar

**818XG-0010**



**001MR8701**  
 Safety radar for automatic sliding doors 12 - 24 V AC - DC.  
 - Application height: 2 ÷ 3,5 m.  
 - Adjustable detection area.

Sensitive platforms

**818XG-0022**



**001MP8030**  
 Sensitive floor-plate 800 x 300 mm.

**818XG-0023**



**001MP8060**  
 Sensitive floor-plate 800 x 600 mm.

# ACCESSORIES

## TEMPERED GLASS LEAVES THICKNESS 10 MM

### Accessories for tempered glass leaves thickness 10 mm

**818XG-0031**



**001MA7370**

Upper connection for tempered glass leaf thickness 10 mm.  
L = 1000 mm.

**818XG-0032**



**001MA7470**

Upper connection for tempered glass leaf thickness 10 mm.  
L = 1500 mm.

**818XG-0033**



**001MA7570**

Upper connection for tempered glass leaf thickness 10 mm.  
L = 2000 mm.

#### NOTES:

If TELESCOPIC series doors are used, the devices: 818XG-0031 - 818XG-0032 - 818XG-0033 are intended for the construction of SLOW leaves.

### Accessories for tempered glass leaves thickness 10 mm for TELESCOPIC series

**818XG-0034**



**001MA7380**

TELESCOPIC series upper connection for tempered glass leaf thickness 10 mm.  
L = 1000 mm.

**818XG-0035**



**001MA7480**

TELESCOPIC series upper connection for tempered glass leaf thickness 10 mm.  
L = 1500 mm.

**818XG-0036**



**001MA7580**

TELESCOPIC series upper connection for tempered glass leaf thickness 10 mm.  
L = 2000 mm.

#### NOTES:

The devices: 818XG-0034 - 818XG-0035 - 818XG-0036 are intended for the construction of FAST leaves.

### Accessories for tempered glass leaves thickness 10 mm for all sliding series

**818XG-0037**



**001MA7353**

Ground guide for tempered glass leaf thickness 10 mm.  
L = 1000 mm.

**818XG-0038**



**001MA7453**

Ground guide for tempered glass leaf thickness 10 mm.  
L = 1500 mm.

**818XG-0039**



**001MA7553**

Ground guide for tempered glass leaf thickness 10 mm.  
L = 2000 mm.

**818XG-0030**



**001MAM004**

Slide guides for doors series TELESCOPIC.

**818XG-0040**



**001MAM601**

Black side gasket for tempered glass leaves thickness 10 mm.  
L = 3000 mm.

**818XG-0041**



**001MAM601T**

Transparent side gasket for tempered glass leaves thickness 10 mm.  
L = 3000 mm.

**818XG-0042**



**001MAM600**

Black central gasket for tempered glass leaves thickness 10 mm.  
L = 3000 mm.

**818XG-0043**



**001MAM600T**

Transparent central gasket for tempered glass leaves thickness 10 mm.  
L = 3000 mm.

# ACCESSORIES

## FRAMED LEAVES

Accessories for framed leaves

**818XG-0024**



**001MA7371**

Universal upper connection for framed door.  
L = 1000 mm.

**818XG-0025**



**001MA7471**

Universal upper connection for framed door.  
L = 1500 mm.

**818XG-0026**



**001MA7571**

Universal upper connection for framed door.  
L = 2000 mm.

**818XG-0027**



**001MA7351**

Universal ground guide for framed leaves.  
L = 1000 mm.

**818XG-0028**



**001MA7451**

Universal ground guide for framed leaves.  
L = 1500 mm.

**818XG-0029**



**001MA7551**

Universal ground guide for framed leaves.  
L = 2000 mm.

**818XG-0030**



**001MAM004**

Slide guides for doors series TELESCOPIC.

# ACCESSORIES

## ANTI-PANIC PUSH-TO-OPEN SYSTEM FOR FRAMED DOOR-LEAVES

Push-to-open anti-panic systems for FLUO-SL STANDARD and FLUO-SL BASIC

**818XC-0018**



Antipanic push-to-open kit for one moving leaf up to 1100 mm.

**818XC-0019**



Antipanic push-to-open kit for one moving leaf up to 1,500 mm.

**818XC-0020**



Antipanic push-to-open kit for 2 moving leaves up to 1100 mm.

**818XC-0021**



Antipanic push-to-open kit for 2 moving leaves up to 1500 mm.

**818XC-0022**



Antipanic push-to-open kit for one moving leaf and one fixed leaf, up to 1100 mm.

**818XC-0023**



Antipanic push-to-open kit for one moving leaf and one fixed leaf, up to 1500 mm.

**818XC-0024**




Antipanic push-to-open kit for two moving leaves and two fixed leaves, up to 1100 mm.

**818XC-0025**



Antipanic push-to-open kit for two moving leaves and two fixed leaves, up to 1,500 mm.

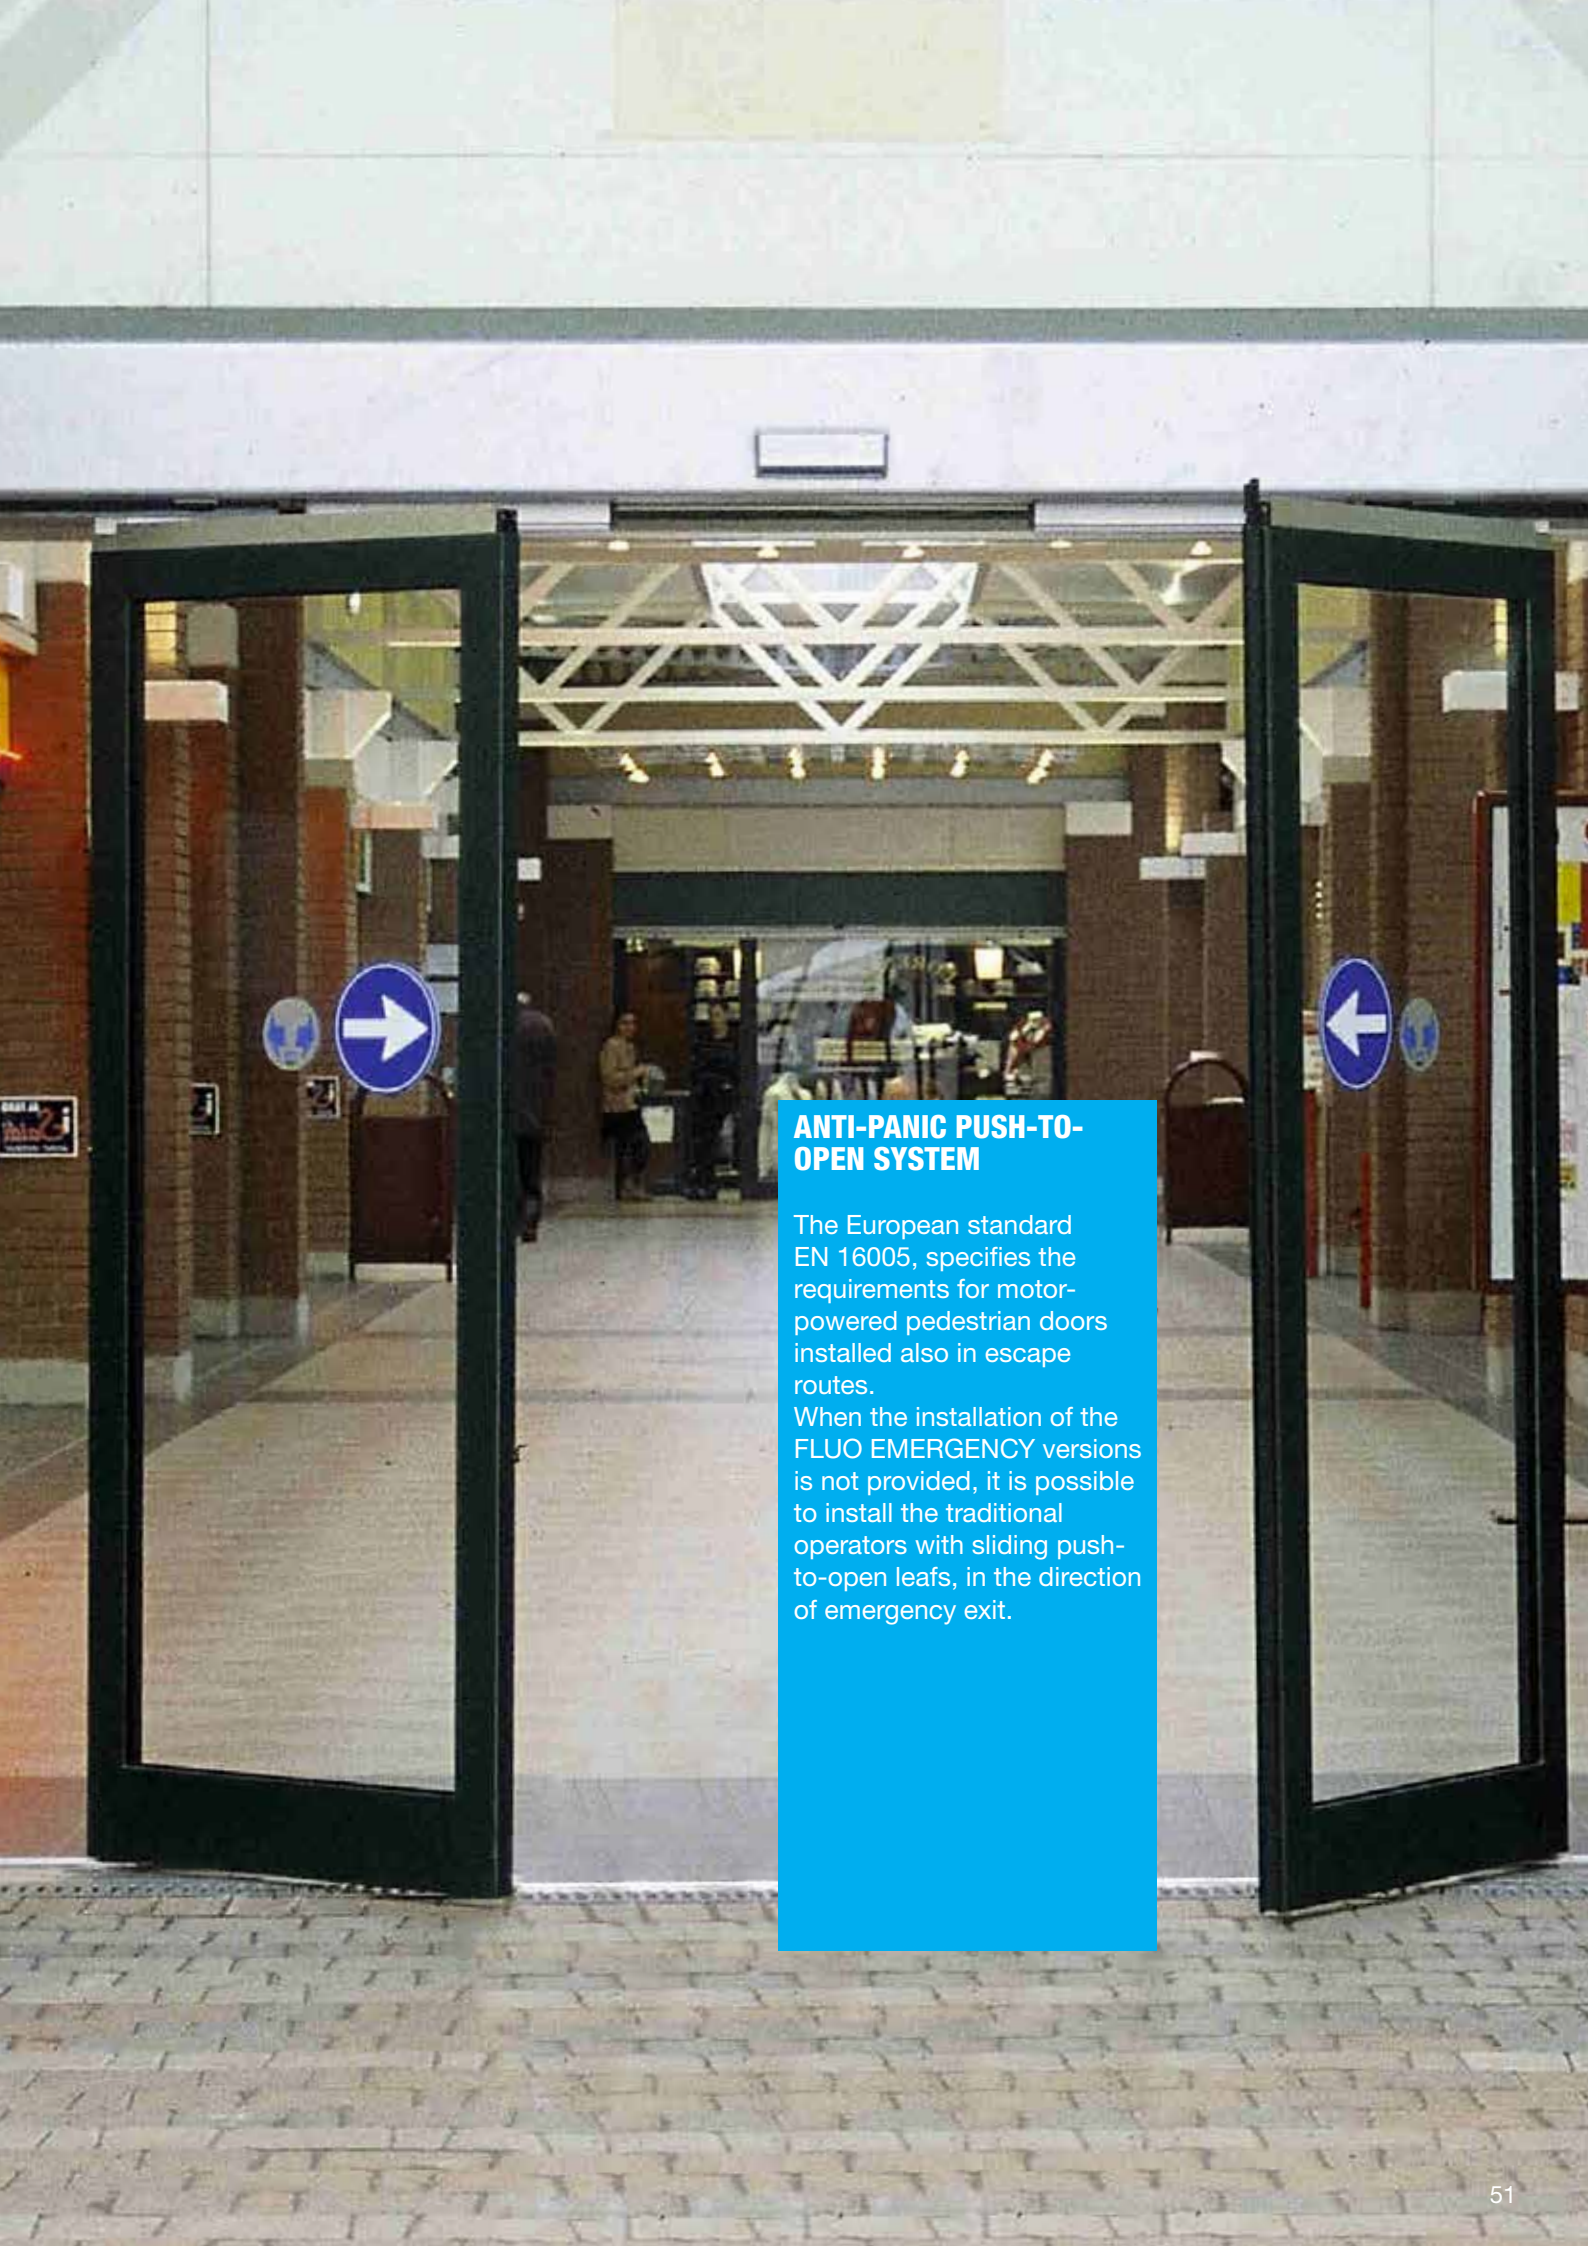

### **ANTI-PANIC PUSH-TO-OPEN SYSTEM**



The European standard EN 16005, specifies the requirements for motor-powered pedestrian doors installed also in escape routes.

When the installation of the FLUO EMERGENCY versions is not provided, it is possible to install the traditional operators with sliding push-to-open leafs, in the direction of emergency exit.

# FLUO-SL BASIC

## FRAMED SLIDING LEAF HEIGHT CALCULATION


Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.

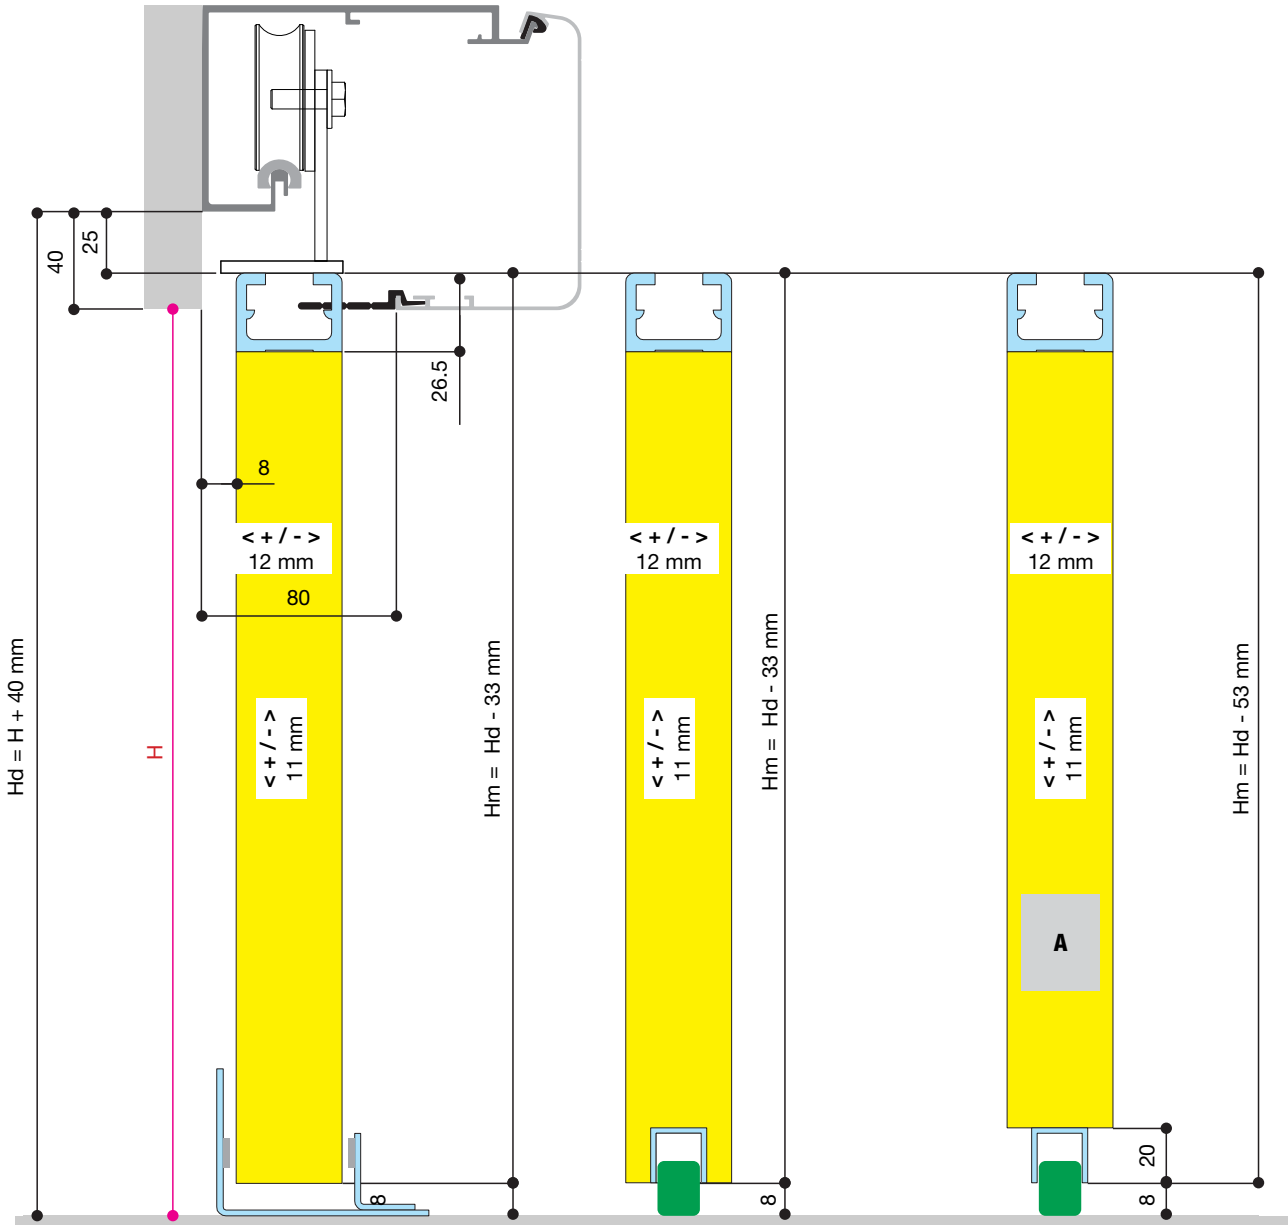

818XG-0024  
 818XG-0025  
 818XG-0026



818XG-0027  
 818XG-0028  
 818XG-0029





**OUTER GUIDE**

In configuration A the OUTER GUIDE is included in articles: 818XG-0024 - 818XG-0025 - 818XG-0026

# FLUO-SL STANDARD - HEAVY - MAGNUM

## FRAMED SLIDING LEAF HEIGHT CALCULATION


Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.

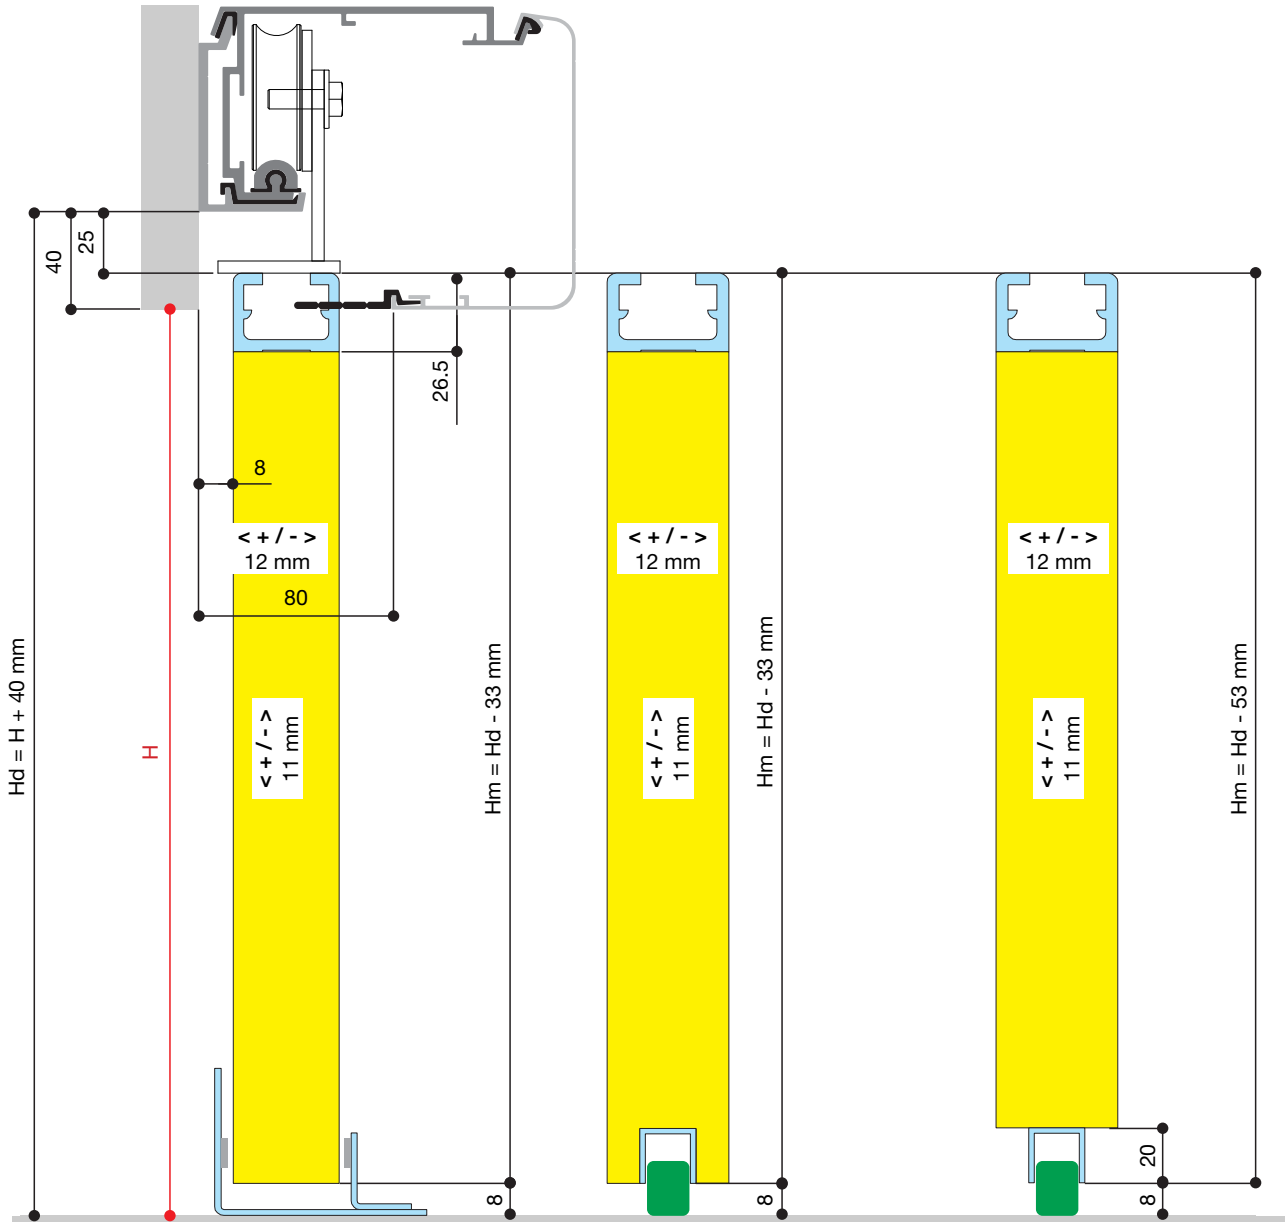

818XG-0024  
 818XG-0025  
 818XG-0026



818XG-0027  
 818XG-0028  
 818XG-0029





OUTER  
 GUIDE

In configuration A the OUTER GUIDE is included in articles: 818XG-0024 - 818XG-0025 - 818XG-0026

# FLUO-SL TELESCOPIC

## FRAMED SLIDING LEAF HEIGHT CALCULATION


Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.

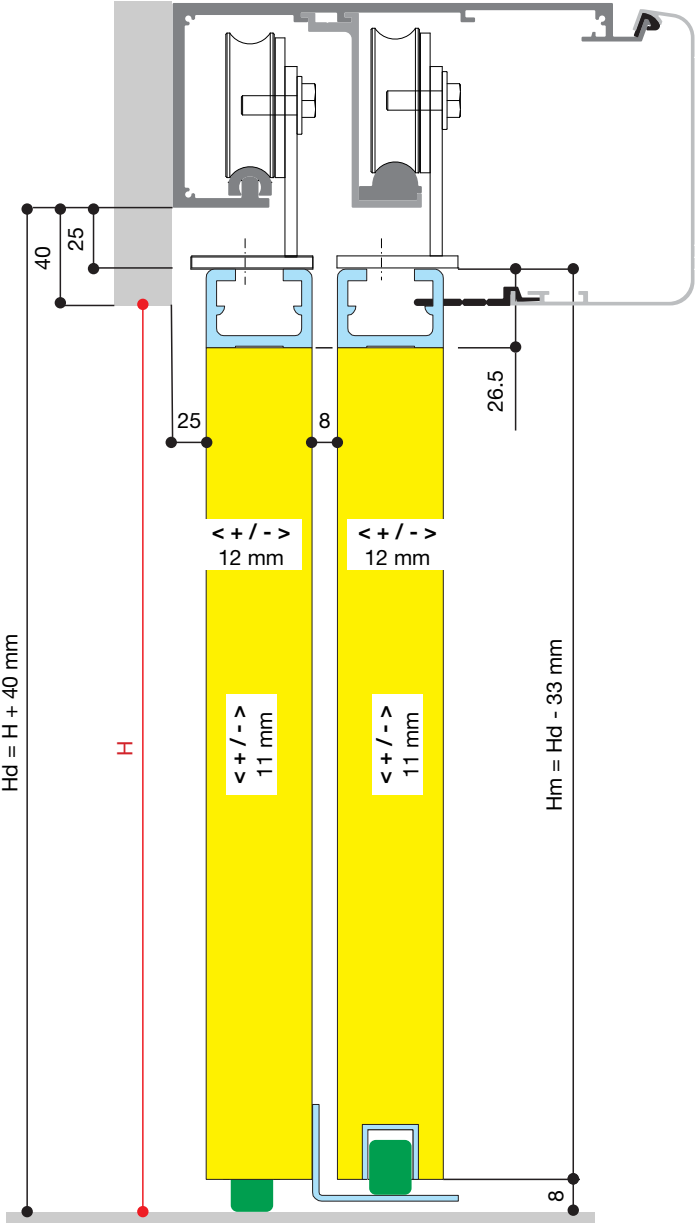

818XG-0024  
 818XG-0025  
 818XG-0026



818XG-0027  
 818XG-0028  
 818XG-0029





818XG-0030




# FLUO-SL BASIC

## GLASS SLIDING LEAF TH. 10 MM HEIGHT CALCULATION


Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.  
 Hg = Glass height with CAME accessories

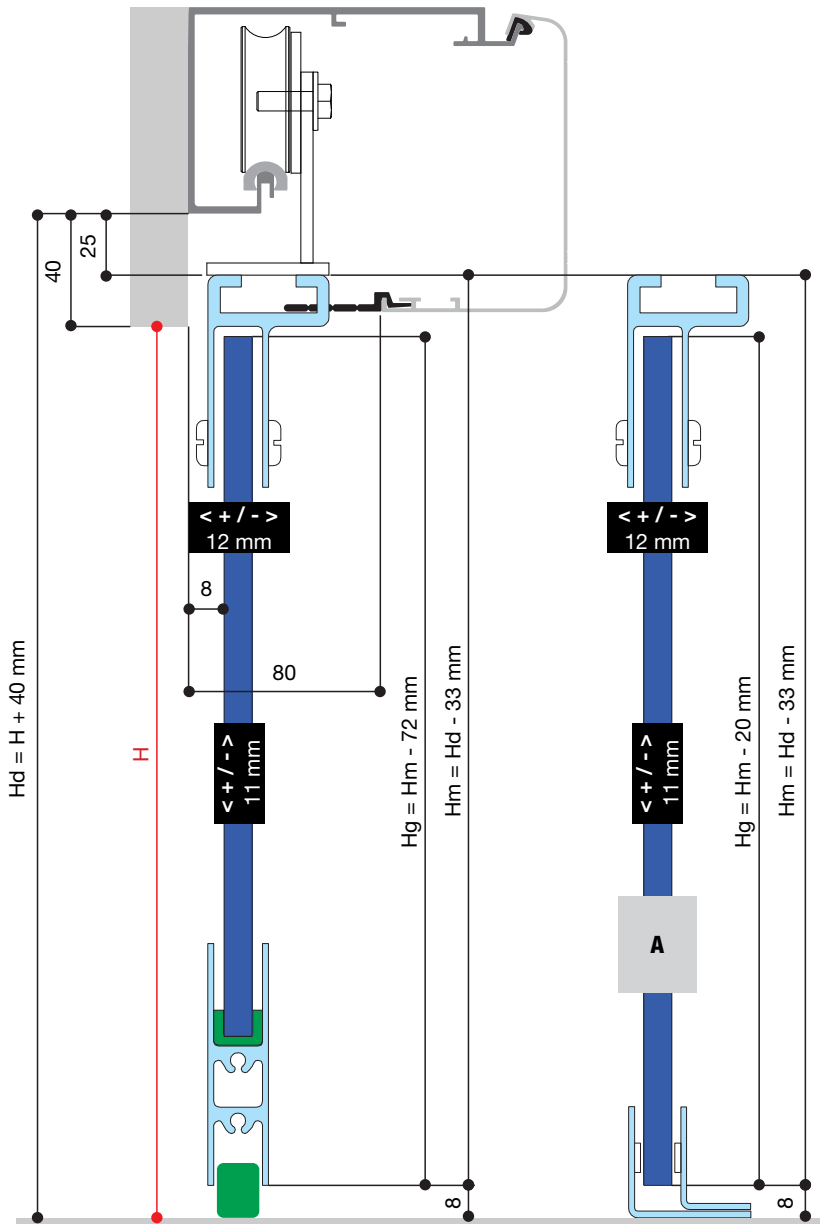

818XG-0031  
 818XG-0032  
 818XG-0033



818XG-0037  
 818XG-0038  
 818XG-0039





OUTER  
 GUIDE

In configuration A the ground guide is included in articles:  
 818XG-0031 - 818XG-0032 - 818XG-0033

# FLUO-SL STANDARD - HEAVY - MAGNUM

## GLASS SLIDING LEAF TH. 10 MM HEIGHT CALCULATION

Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.  
 Hg = Glass height with CAME accessories

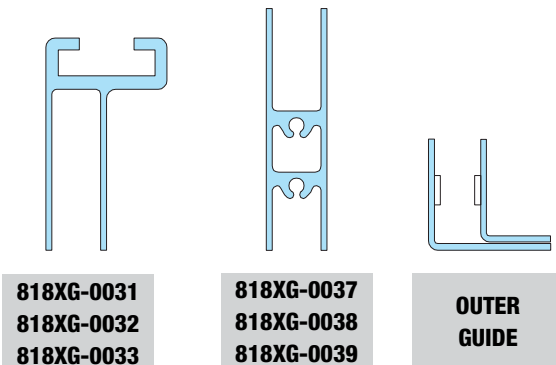
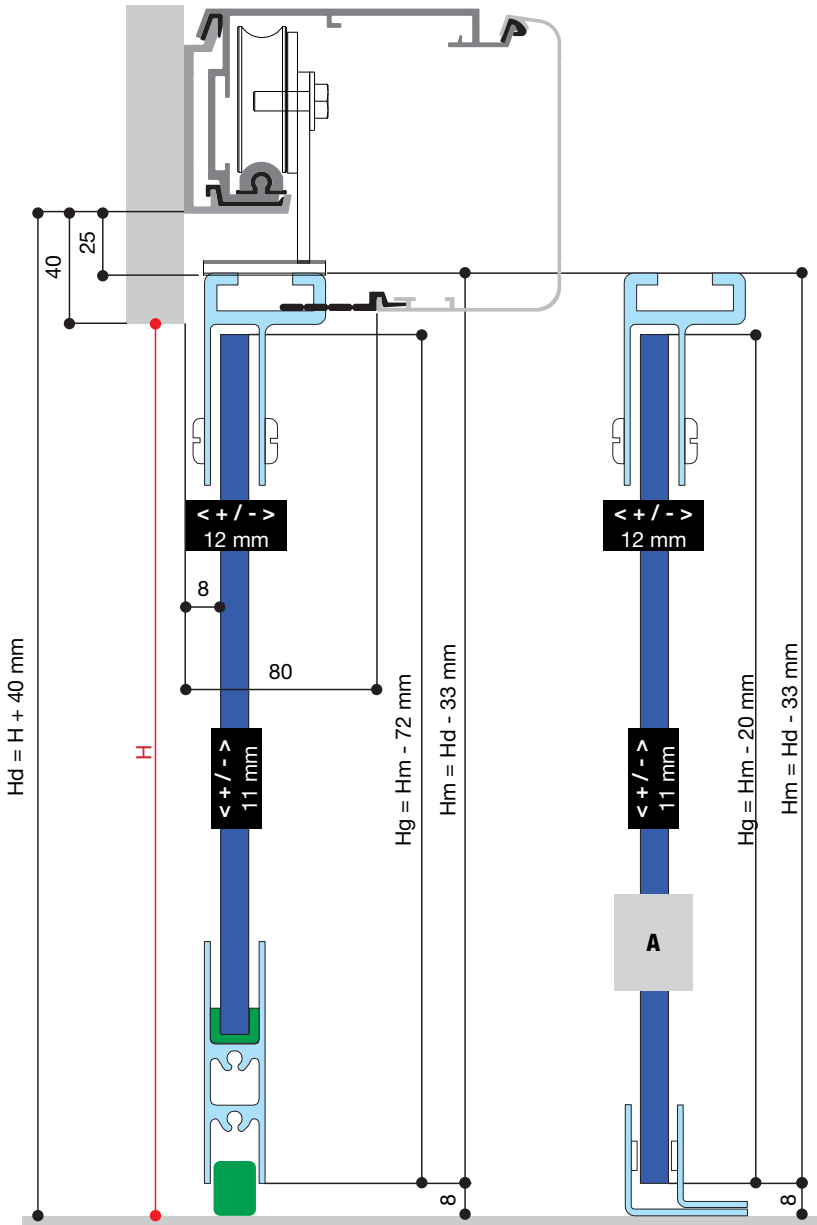


In configuration A the ground guide is included in articles:  
 818XG-0031 - 818XG-0032 - 818XG-0033


# FLUO-SL TELESCOPIC

## GLASS SLIDING LEAF TH. 10 MM HEIGHT CALCULATION


Hd = Height from the ground for fastening the beam.  
 H = Height of the light.  
 Hm = Total height of the moving leaf.  
 Hg = Glass height with CAME accessories

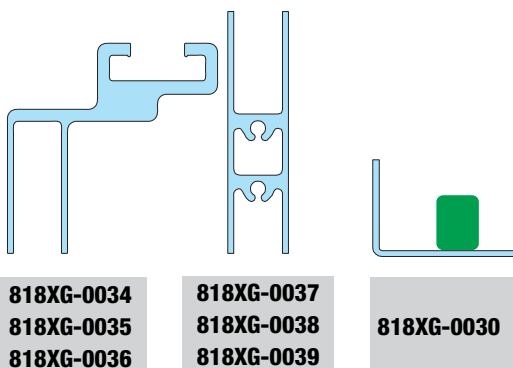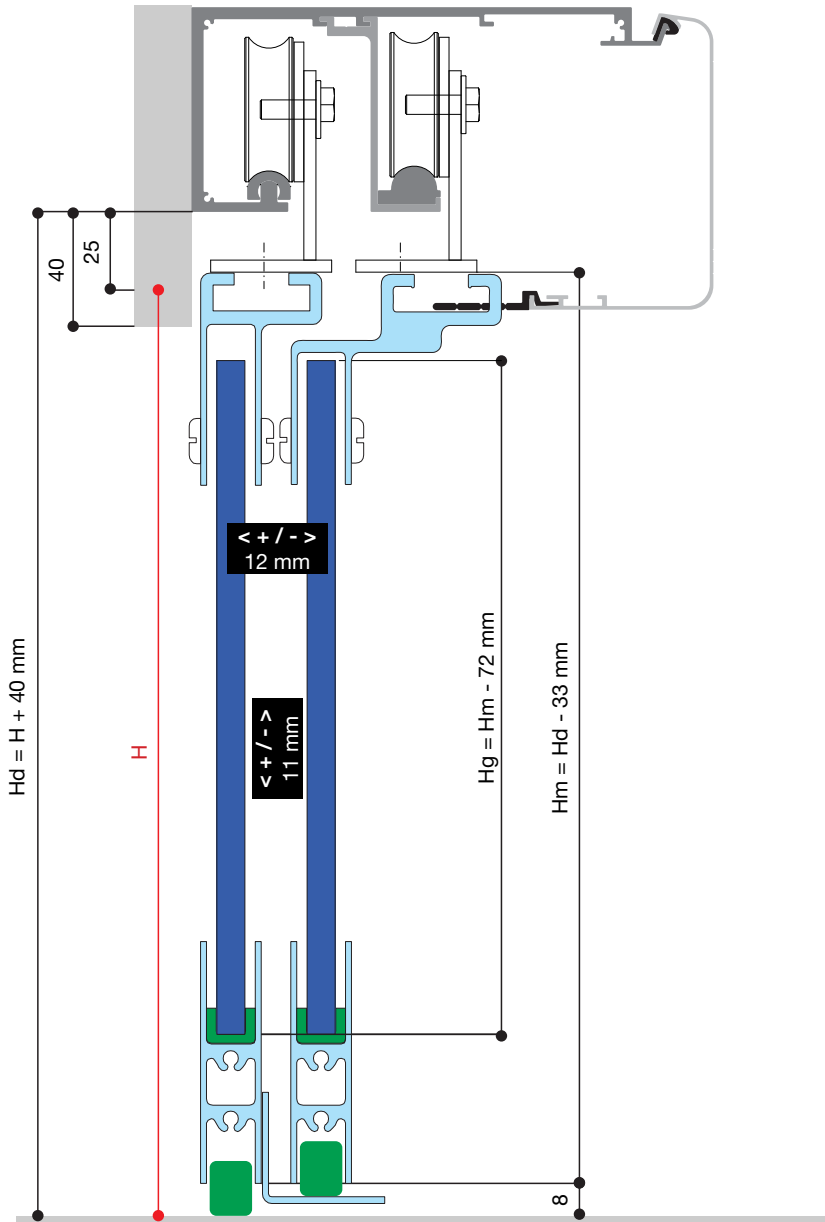


# PROFILES FOR LEAVES: SECTIONS AND DIMENSIONS SCALE 1:1

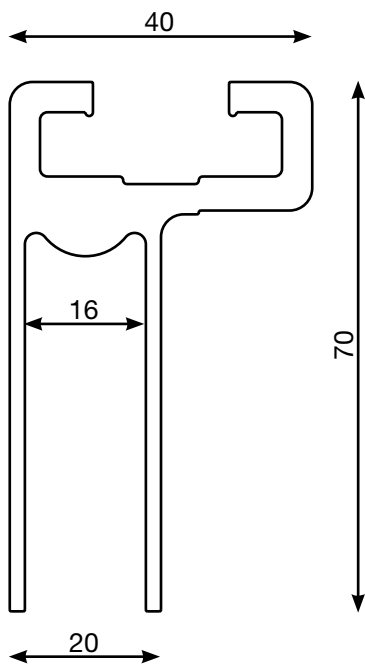


818XG-0031  
818XG-0032  
818XG-0033

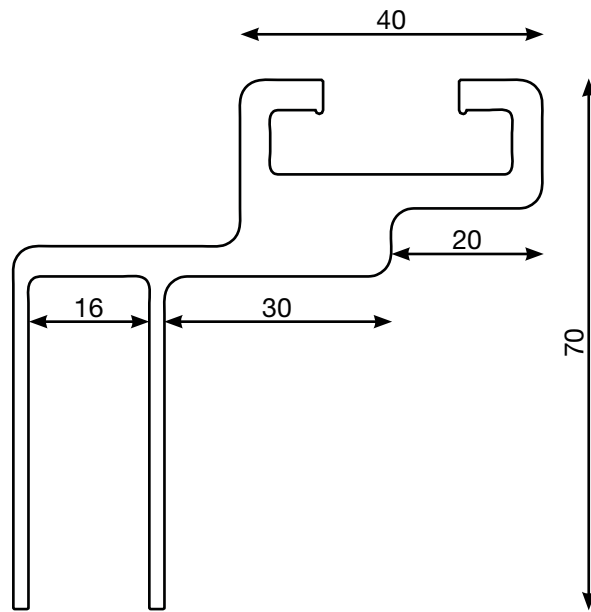


818XG-0031  
818XG-0032  
818XG-0033

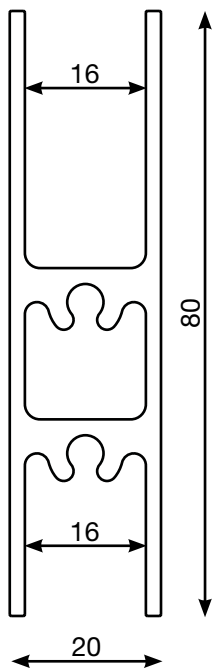


818XG-0037  
818XG-0038  
818XG-0039

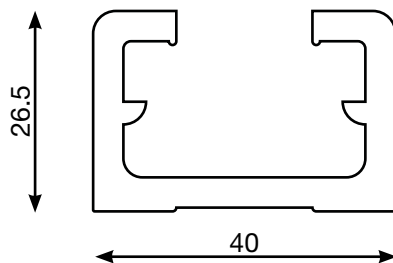

818XG-0024  
818XG-0025  
818XG-0026



818XG-0027  
818XG-0028  
818XG-0029

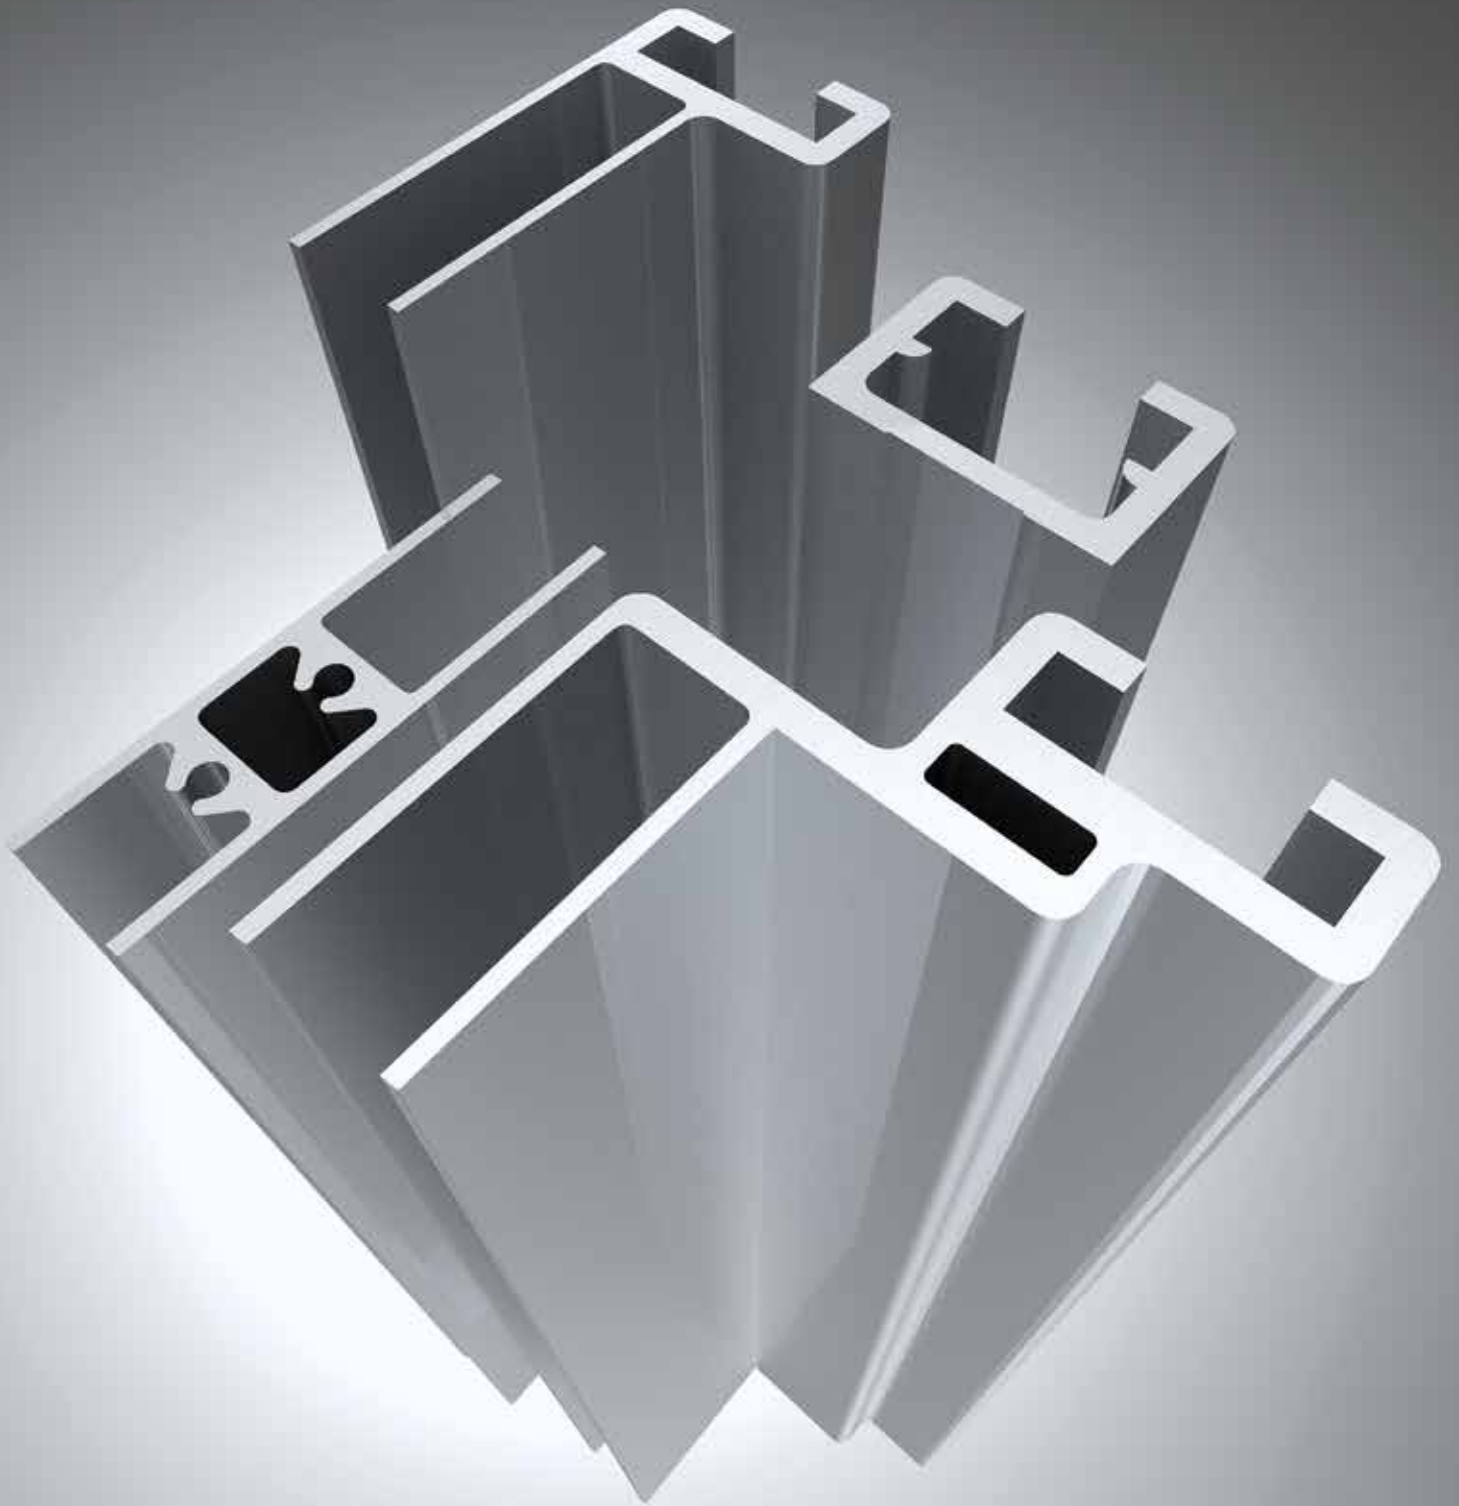

# ANALYTICAL INDEX

Code	Page	Code	Page	Code	Page
001TSTM1	52	818XA-0053	51	818XG-0041	54
818SL-0010 / 19	40	818XA-0059	25	818XG-0042	54
818SL-0020 / 29	40	818XA-0060	43	818XG-0043	54
818SL-0030 / 39	40	818XC-0010	50	8K18SL-001	41
818SL-0040 / 49	40	818XC-0011	50	8K18SL-002	41
818SL-0050 / 59	38	818XC-0012	50	8K18SL-003	39
818SL-0060 / 69	38	818XC-0013	50	8K18SL-004	39
818SL-0070 / 79	38	818XC-0014	50	8K18SL-006	43
818SL-0080 / 89	38	818XC-0015	50	8K18SL-007	45
818SL-0090 / 99	42	818XC-0016	50	8K18ST-001	47
818SL-0100 / 109	42	818XC-0017	50	8K18ST-002	47
818SL-0130 / 139	44	818XC-0018	56		
818SL-0140 / 147	44	818XC-0019	56		
818ST-0010 / 20	46	818XC-0020	56		
818ST-0021 / 27	46	818XC-0021	56		
818ST-0030 / 40	46	818XC-0022	56		
818ST-0041 / 47	46	818XC-0023	56		
818SW-0010	24	818XC-0024	56		
818SW-0020	24	818XC-0025	56		
818SW-0030	24	818XC-0026	52		
818SW-0040	24	818XC-0029	50		
818SW-0050	24	818XC-0035	50		
818SW-0060	24	818XC-0036	50		
818SW-0070	24	818XC-0038	25		
818SW-0080	24	818XC-0039	25		
818SW-0090	24	818XC-0040	25		
818SW-0100	24	818XG-0010	53		
818SW-0110	24	818XG-0011	53		
818SW-0120	24	818XG-0012	53		
818SW-0130	24	818XG-0013	53		
818XA-0010	51	818XG-0014	53		
818XA-0012	51	818XG-0015	53		
818XA-0014	51	818XG-0016	53		
818XA-0015	51	818XG-0017	52		
818XA-0016	51	818XG-0018	52		
818XA-0017	51	818XG-0019	52		
818XA-0018	51	818XG-0020	52		
818XA-0019	51	818XG-0021	52		
818XA-0021	51	818XG-0022	53		
818XA-0023	51	818XG-0023	53		
818XA-0024	41	818XG-0024	55		
818XA-0030	39	818XG-0025	55		
818XA-0032	51	818XG-0026	55		
818XA-0033	47	818XG-0027	55		
818XA-0034	51	818XG-0028	55		
818XA-0035	51	818XG-0029	55		
818XA-0037	50	818XG-0030	54		
818XA-0040	25	818XG-0031	54		
818XA-0041	25	818XG-0032	54		
818XA-0043	52	818XG-0033	54		
818XA-0045	25	818XG-0034	54		
818XA-0046	25	818XG-0035	54		
818XA-0047	25	818XG-0036	54		
818XA-0048	25	818XG-0037	54		
818XA-0049	25	818XG-0038	54		
818XA-0050	52	818XG-0039	54		
818XA-0051	25	818XG-0040	54		



**CAME** 







**CAME S.P.A.**

Via Martiri della Libertà, 15  
31030 Dosson di Casier  
Treviso - ITALY



© CAME SPA - KACENAO019 - 2019 - ENEX  
CAME RESERVES THE RIGHT TO MAKE ANY CHANGES TO THIS DOCUMENT AT ANY TIME.  
EVEN PARTIAL REPRODUCTION IS PROHIBITED.



**CAME S.p.A.**  
is Quality, Environment and Safety certified  
according to the following standards:  
**UNI EN ISO 9001**  
**UNI EN ISO 14001**  
**BS OHSAS 18001**

**CAME.COM**